




Barn Light LED UL/DLC

Series: SL Model: 08



CE RoHS IP65

Note: The elbow post is included in the packaging.

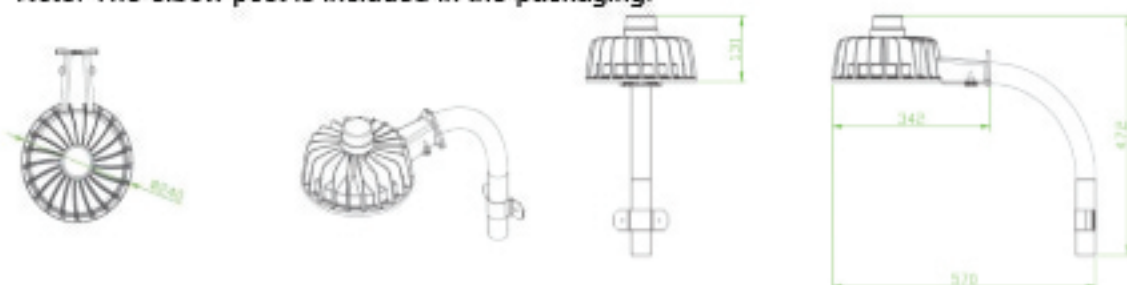

Series	Model	Dimm or Non	Watts	Volts	Color	Mount	Beam °	Lens	Photo cell
SL	09 = Barn Light (UL)	N= Non-Dimm	X60=60W (09 only)	02=12VDC (09 Only)	W60=6000K W50=5000k	W=Wall Mount P=Pole Mount	G=120 Deg	M=Milk (09 only)	Y=Yes
	08=Barn low profile (UL/DLC)		X35=35W (08 only)	10=100~277V ac	W40=4000k			C=Clear (08 only)	N=No
			X50 = 50W (08 only)		W27=2700k				

Dusk-to-dawn photocell



Model :		SL08NX3510	SL08NX5010
OVERALL LAMP PARAMETERS	Input Voltage	100-277VAC	
	Input Current	0.5A @100V / 0.2A @277V	0.8A @100V / 0.3A @277V
	Input Power	35W	50W
	Power Factor	PF≥0.95	
	Luminance	2900LM	4200LM
	Luminous Efficiency	88LM/W	84LM/W
	CRI	>70	
	Beam Angle	120°	
	Main Structure	Aluminum + Tempered Glass	
	LED DRIVER	Output Voltage	22-36VDC
	Output Current	1.0A	1.4A
	Driver Efficiency	88%	89%
LED	LED Manufacturer	CREE	
	LED Type	COB	
	LED Efficacy	110LM/W	110LM/W
	Color Temperature	WW/NWCW (2700K-6500K)	
Photocell	-	dusk-to-dawn, UL listed	
LIFESPAN & ENVIRONMENT	Lifespan	50000Hrs.	
	Warranty	5 Years	
	IP Rating	IP65, Wet Locations	
	Operating Temperature	-20°C—+40°C	
	Storage Temperature, Humidity	-40°C—+80°C, 10—90% RH	
SAFETY&EMC	Safety Norms	UL1598, UL8750, EN60598, EN61347-2-13, EN62031, EN62471	
	Withstand Voltage	I/P-FG: 2121VDC	
	Grounding Resistance	25A 100mΩ	
	Electromagnetic Compatibility	EN55015, EN61000-2-3, EN61000-3-3, EN61547	
OTHERS	Dimension	131 x 342	See Drawing
	Net Weight	2.6KG	
	Gross Weight	3.0KG	
	Packing Size		
	Q'ty / Carton	1PCS	
Volume	0.020cbm/carton		