



Flood Light - Dimmable R40/R30/R20

Series: RSEX Model: 02, 03 and 04 (Energy Star)

Energy Star

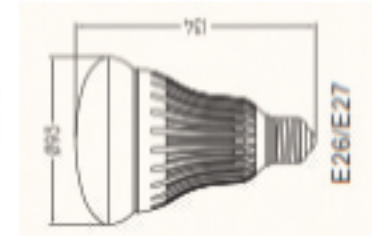




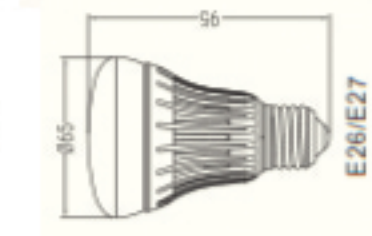

RSEX

- Recessed 75~100W Replacement
- Little or no heat
- No UV
- Won't attract bugs
- UL, CE, FCC, RohS, Energy Star rated

RSEX03



RSEX02



Model	Power	Dimensions	LED Qty.	Lm
RS02(R20)	8W	65X 95mm	8 x 1	500
RSE03(R30)	12W	93 x 134mm	12 x 1	800
RSE04(R40)	17.5W	125 x 160mm	17 x 1	1100

Electrical Parameters

Voltage	110/120Vac
Driver Type:	Built-in driver with PFC
Power factor:	>.9
Efficiency:	>.85

Other Basic Parameters

Light source:	High Bright Dimmable SMD LED
Color temperature:	Warm white (2700k)
CRI:	>80%
Beam angle:	120 Deg.
Materials:	Aluminum +PMMA lens
Lens:	Diffused milk white
Lifespan:	50,000 Hours
Working environment:	Indoor -25c~+45C. Humidity 10%~90%

Part # Example: RSE02DXX807W50E26GFW



Series	Model	Dim or Non	Watts	Volts	Color*	Base	Beam	Lens	Body Color
RSEX (Energy Star)	02-R20	D - Yes	XX8-8W	07-110/120VAC	W30-3000K	E26	G-140	F-Frosted	W-White (Energy Star)
RS	03-R30	N - No	X12-12W		W40-4000K				
	04-R40		175-17.5W		W55-5500K				