



High Power Flood Light UL/DLC

Series: OFZ Model: 01~02
IP65 Weatherproof

Benefits:
90% Energy Savings
Low or no heat
IP65 Weatherproof
Long Life Powder Coat
50,000 hrs life


Available in UL and DLC

Applications:
•Parking Garage
•Parking Lot
•Wall and Area Lighting
•Indoor or Outdoor
•Commercial buildings
•Residential
•Schools
•Medical


Example 150W

Luminous flux(Φ (lm)): 12750±5%
Color Temperature: 6000K, 4000K, 3000K
Luminous Efficacy (LM/W): 80-90lm/W
CRI: ≥80
Beam Angle: 120°
Input Voltage (V): 100-240V 277VAC N. America only, 50/60Hz
Power (W): 150W
PFC (PF): 0.9
LED Quantity: 168pcs
Material: AL+Glass
Size: 298*365*187mm
The surface color: Black
Net Weight (kg): 6.57kg
IP Level: IP65
Lifespan: ≥50000Hrs
Warranty: 5 years


Distribution Curve Flux:

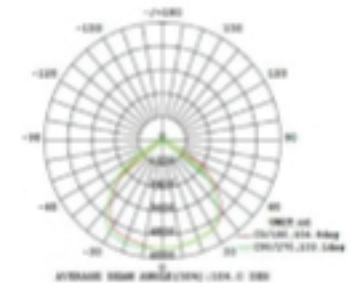

Illumination Analysis:

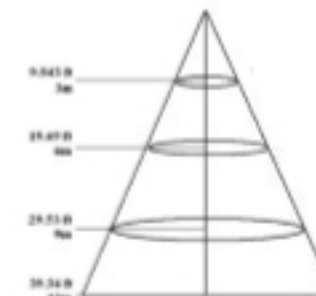

Height (ft)	Illumination (lux)
9.843ft	610.4lx
19.69ft	152.6lx
29.53ft	67.83lx
39.36ft	38.15lx

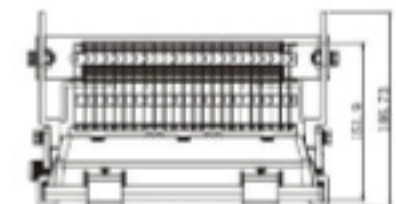

Catalog part number:OFZ01N15010CW__GCB

347~480VAC AVAIL IN 75w, 100w AND 150w

Series	Model	Dim or Non-Dimmable	Watts	Volts	Color	Base	Beam	Lens	Body Color
OFZ High Power	01-UL 02-DLC	N= Non-Dimm	X10=10W X20=20W X30=30W X50=50W X70=70W 100=100W 150=150w 200=200W	10=100~277VAC 38=347~480	W30=3000K W40=4000K W50=5000K	C=3FT (std) D=4FT E=5FT F=6FT	G=120	C=Clear	B=Black