




**LED Low Profile Canopy 100~277, 312~512vac**

Series: CSD  
Model: 07

Features

- Sealed die-cast profile for outdoor applications
- Replaces 100~250W HID
- Three 1/2" Conduit and one 3/4" Conduit knock outs
- Lumen 3800
- Voltages 120, 277 and 347vac
- Polycarbonate optical lens with UV stabilizers
- Built-in Class 2 driver, optional photocell
- Easy installation

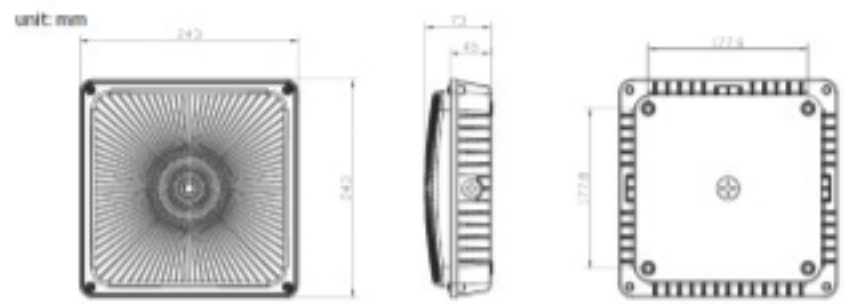

Power:	45W/70w
Voltage:	100~277vac, 312~528vac
CCT:	3000,4000, 5000k
Finish:	Bronze or Black
Lumen:	3800/5600
Life (L70):	50,000 hrs
Warranty:	5 Years
PF:	0.95
THD:	15%
Freq:	50/60hz

UL: E359489  
DLC: Approved

Series	Model	Motion Sensor	Power (W)	Volts	CCT	Mount	Body Color
CSD	07 (Std)	N=No	X30=30	10=100-277	W3=3000k	S=Surface	W=White
		Y=Yes	X60=60W	31=312~528	W40=4000k		B=Black
		D=2 stage Motion Dimmable	X80=80W		W50=5000k		R=Bronze
			X90=90W		W60=6000k		
			120=120				

