




Round Ultra-Thin Panel Light

Series: PR, PRU Model: 01~06

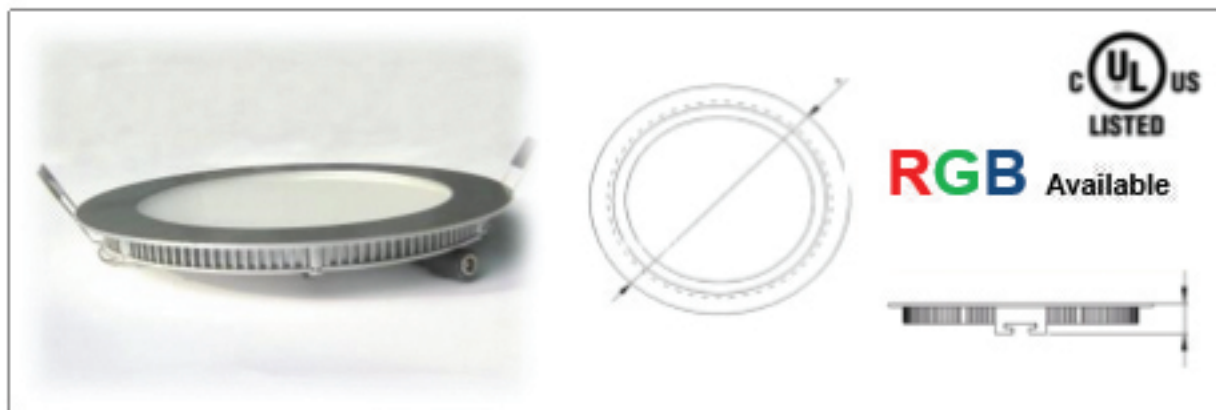

Other Basic Parameters

Light source: 3528 SMD LED
 Color temperature: Warm white (3000k)
 Neutral white (4000k)
 Cool white (5000k)
 CRI: >75
 Beam angle: 150°
 Materials: Aluminum+PMMA Lens
 Working environment: -25~+45deg C
 Lifespan: 50,000 Hours

Electrical Parameters

Input Voltage: AC 120v Dimmable, 100~277, 85~265, 12/24DC Non Dim
 Driver Type: External constant current UL
 Power factor: >.9
 Efficiency: >.85

Part # Example: PRU01DXX707W55E26KFS

XX XX X XXX XX XXX X X X X

| Series | Model | Dim or Non-Dim | Watts | Volts | Color* | Base | Beam | Lens | BODY COLOR |
|--------|-------------------|----------------|-------------------|---------------|---|------------------------|-------|-----------|------------|
| PRU | 01 - 4 INCH (9W) | D - YES | XX9-9W X12-12W | 02-12VDC | W01-Red | BW-Barewire | L-150 | F-Frosted | S-Silver |
| | 02 - 6 INCH (12W) | N - NO | X18-18W | 04-24VDC | W02-Green | E26-E26 Adaptor | | | W-White |
| | 03 - 8 INCH (18W) | | X25-25W | 07-110/120VAC | W03-Blue | CM-Custom Connector | | | B-Black |
| | 06 - 10" (25W) | | | 10-100~277VAC | W04=Yellow W05=Amber W06=RGB W27-2700K W40=4000K W50=5000K | | | | C-Custom |

*Colored Lights 50 Piece Minimum

| Series (Model) | Power (Watts) | Dimensions | Cut Out | Lm/ W |
|----------------|---------------|------------|---------|-------|
| PR01 (4") | 9 | 145 x 16mm | 125mm | 80 |
| PR02 (6") | 12 | 180 x 16mm | 160mm | 80 |
| PR03 (8") | 18 | 240 x 16mm | 220mm | 80 |
| PR06 (10") | 25 | 300 x 19mm | 280mm | 80 |

