



PRODUCT FEATURES

The ETLB7 is the lighting solution for a wide variety of applications and mounting heights. Precision-designed optics, multiple distributions, and a choice of lumen outputs and color temperatures make the energy-efficient ETLB7 the ideal solution for industrial, commercial and other high bay applications.

MOUNTING

- Chain or Cable mounting ready
- Surface Mounting, Pendant Mounting and Suspending Mounting

WARRANTY

- 10-year warranty

APPLICATIONS

- Designed to meet recommended luminance and illuminance requirements for High bay and Low bay applications.

RATINGS


- DLC Listed
- UL 1598 suitable for damp locations
- UL 8750 LED equipment in Lighting Products
- Ambient temperatures rated for -20°C to 50°C when fixture is suspended at least 18" from ceiling
- The 0-10V Dimming type is continuous
- The product can dim to 10%




ORDERING EXAMPLE: ETLB7-2/2/BLM/085/FL/840/U/AU1/F1/A3/B3/SN/EMN

ETLB7	2	2	BLM	085	PO	8XX	U
Series	Housing	Module	Module Type	Number	Lens	CRI	Input Voltage
ETLB7=LED Highbay Type 07	2FT 4FT	2L 3L 4L 6L	BW BLM BWM BWH BLM BLS	XXX can be any data	FL=FROSTED LENS	840 850	U=120-277 3=120-347 4=347-480
Aux	Fx	Ax	Bx	Sx	Emx	Mounting	
AUXILIARY 12V	FLICKER	Manufacturer	LEDS	SENSOR	EMERGENCY	OPTIONAL	
AU1=without 12V AUX AU2=with 12V AUX	F1 = 10% Flicker F2 = 30% Flicker	A3 = Simon	B3 = Seoul	SN = NONE S1=Simon S2=Hytronik S3=Merrytek	EMN=NONE EM1=ACT EM2=Simon	V-Hook V-Hook+Chain Cable Wireguard Surface Pendant Suspending	


DIMENSIONS: MM

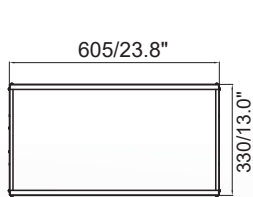


Wattage Range:65-155W

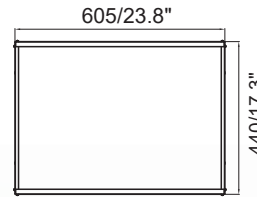

Wattage Range:170-210W

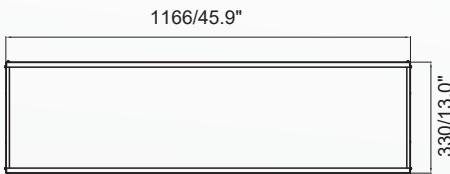

Wattage Range:255-300W

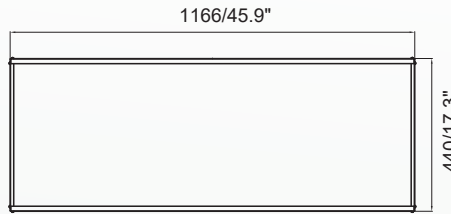

Wattage Range:400W


Specifications:

ETLB7-2FT

Length: 605 (23.8")
Width: 330/440 (13 / 17.3")
Depth: 92.5 (3.6")
Weight: 4.6/5.70 (kg)

ETLB7-4FT

Length: 1166 (45.9")
Width: 330/440 (13 / 17.3")
Depth: 92.5 (3.6")
Weight: 8310/9.60 (kg)

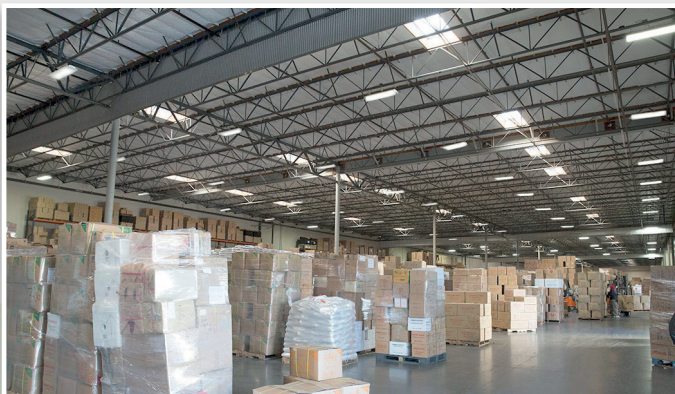



PHOTOMETRIC TEST LIST

Catalog No.	Lumens Rated	Watts Rated	Efficacy Rated
ETLB7-2/2/BW/065/FL/840/U/AU1/F1/A3/B3/SN/EMN	9295	65	143
ETLB7-2/2/BW/065/FL/850/U/AU1/F1/A3/B3/SN/EMN	9360	65	144
ETLB7-2/2/BLM/085/FL/840/U/AU1/F1/A3/B3/SN/EMN	12495	85	147
ETLB7-2/2/BLM/085/FL/850/U/AU1/F1/A3/B3/SN/EMN	12580	85	148
ETLB7-2/2/BWM/105/FL/840/U/AU1/F1/A3/B3/SN/EMN	15435	105	147
ETLB7-2/2/BWM/105/FL/850/U/AU1/F1/A3/B3/SN/EMN	15540	105	148
ETLB7-2/4/BWH/130/FL/840/U/AU1/F1/A3/B3/SN/EMN	19110	130	147
ETLB7-2/4/BWH/130/FL/850/U/AU1/F1/A3/B3/SN/EMN	19240	130	148
ETLB7-2/3/BWM/155/FL/840/U/AU1/F1/A3/B3/SN/EMN	22785	155	147
ETLB7-2/3/BWM/155/FL/850/U/AU1/F1/A3/B3/SN/EMN	22940	155	148
ETLB7-2/4/BLM/170/FL/840/U/AU1/F1/A3/B3/SN/EMN	24990	170	147
ETLB7-2/4/BLM/170/FL/850/U/AU1/F1/A3/B3/SN/EMN	25160	170	148
ETLB7-2/6/BLS/210/FL/840/U/AU1/F1/A3/B3/SN/EMN	30870	210	147
ETLB7-2/6/BLS/210/FL/850/U/AU1/F1/A3/B3/SN/EMN	31080	210	148
ETLB7-4/3/BLM/255/FL/840/U/AU1/F1/A3/B3/SN/EMN	37485	255	147
ETLB7-4/3/BLM/255/FL/850/U/AU1/F1/A3/B3/SN/EMN	37740	255	148
ETLB7-4/3/BWM/300/FL/840/U/AU1/F1/A3/B3/SN/EMN	44100	300	147
ETLB7-4/3/BWM/300/FL/850/U/AU1/F1/A3/B3/SN/EMN	44400	300	148
ETLB7-4/4/BWM/400/FL/840/U/AU1/F1/A3/B3/SN/EMN	58800	400	147
ETLB7-4/4/BWM/400/FL/850/U/AU1/F1/A3/B3/SN/EMN	59200	400	148

