




4 FT



COLOR/WATTAGE SELECTION

8 FT

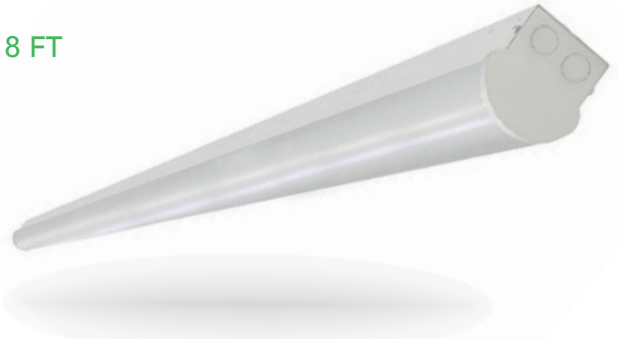

COLOR/WATTAGE SELECTION

PRODUCT FEATURES

The small size of the ETLSN makes it an ideal choice for size restricted architectural applications. The ETLSN-N Series can be the illumination solution in commercial, industrial, retail and residential applications. Fixtures can be used in storage/utility ares, coves, display cases, shops, task and general area lighting.

MOUNTING

- V-Hook ready
- Surface Mounting

WARRANTY


- 10-year warranty

APPLICATIONS

- Offices
- Hallways
- Multipurpose Rooms
- Conference Rooms

RATINGS

- DLC Listed
- UL 1598 suitable for damp locations
- UL 8750 LED equipment in Lighting Products
- Temperature Rated at (-20°C to +50°C) (-4°F to 122°F)
- The 0-10V Dimming type is continuous
- The product can dim to 10%

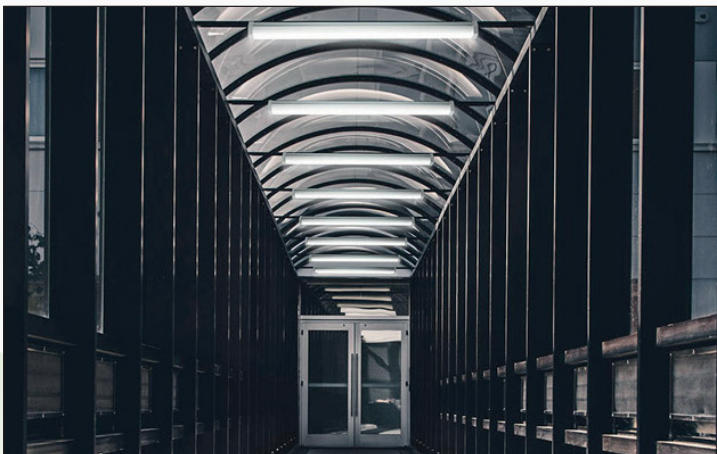



ORDERING INFORMATION: EXAMPLE: ETLSN-N-4FT/FF/30/25/18/YDM/CCT 8XX (A3+B3+C1+EM)

ETLSN-N	4ft	NF	30/25/18	YDM	OP	
Series	Size	Module Type	Number	Dimming	Lens	Voltage
ETLSN-N=LED STRIP-N	4ft 8ft	NH FF FH	YY can be any data	YDM=0-10V Dimming NDM=NONE Dimming	FL=FROSTED LENS	BLANK=120-277 120-347 347S

CCT	8XX	Ax	By	Cz(OP)	EM	
	Color Temp	LED Driver	LEDS Package	Sensor	Battery Back-up	
WHITE TUNABLE	835-850	A3=Simon	B3=Seoul 3528	BLANK=NO SENSOR C1=HYTRONIK HC403V-RC C2=MERRTRK MC054V-RC	BLANK=NO EM EM	

DIMENSIONS: MM

Specifications


ETLSN-N-4FT/8FT

Length: 1202/2392(47.3"/94.2")

Width: 85.2 (3.4")

Depth: 90.5(3.6")

Weight: 2.05/4.10(kg)

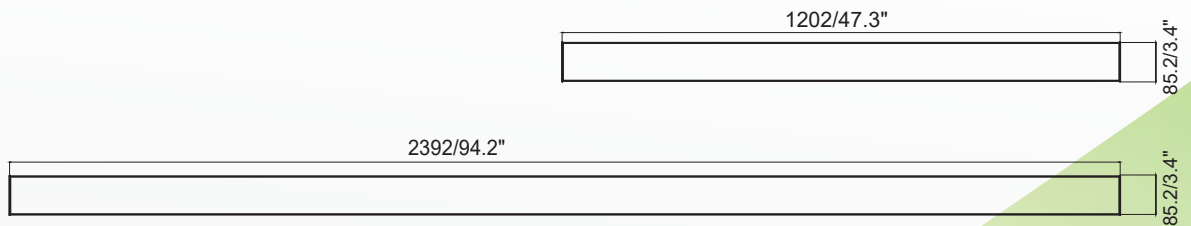



PHOTOMETRIC TEST LIST

Catalog No.	Lumens Rated	Watts Rated	Efficacy Rated	CCT Range			
ETLSN-N-4FT/FF/30/25/18/YDM/CCT 8XX(A3+B3)	3900	30	130	835-850			
	3930	30	131				
	6960	30	132				
	ETLSN-N-4FT/FF/30/25/18/YDM/CCT 8XX(A3+B3)	3350	25	134	835-850		
		3375	25	135			
		3400	25	136			
		2484	18	138			
	ETLSN-N-4FT/FF/30/25/18/YDM/CCT 8XX(A3+B3)	2502	18	139	835-850		
		2520	18	140			
ETLSN-N-4FT/NH/45/38/34/YDM/CCT 8XX (A3+B3)		5895	45	131		835-850	
		5940	45	132			
		5985	45	133			
	ETLSN-N-4FT/NH/45/38/34/YDM/CCT 8XX (A3+B3)	5206	38	137	835-850		
		5244	38	138			
		5282	38	139			
		4760	34	140			
	ETLSN-N-4FT/NH/45/38/34/YDM/CCT 8XX (A3+B3)	4794	34	141	835-850		
		4828	34	142			
ETLSN-N-8FT/FF/54/46/38/YDM/CCT 8XX(A3+B3)		7020	54	130		835-850	
		7074	54	131			
		7128	54	132			
		ETLSN-N-8FT/FF/54/46/38/YDM/CCT 8XX(A3+B3)	6164	46		134	835-850
			6210	46		135	
			6254	46		136	
	ETLSN-N-8FT/FF/54/46/38/YDM/CCT 8XX(A3+B3)	5244	38	138	835-850		
		5282	38	139			
		5320	38	140			
ETLSN-N-8FT/NH/90/75/65/YDM/CCT 8XX (A3+B3)		11790	90	131		835-850	
		11880	90	132			
	11970	90	133				
	ETLSN-N-8FT/NH/90/75/65/YDM/CCT 8XX (A3+B3)	10275	75	137	835-850		
		10350	75	138			
		10425	75	139			
		9100	65	140			
	ETLSN-N-8FT/NH/90/75/65/YDM/CCT 8XX (A3+B3)	9165	65	141	835-850		
		9230	65	142			





PHOTOMETRIC TEST LIST

Catalog No.	Lumens Rated	Watts Rated	Efficacy Rated	CCT Range		
ETLSN-N-4FT/FF/30/25/18/YDM 8XX(A3+B3)	3900	30	130	835-850		
	3930	30	131			
	6960	30	132			
	ETLSN-N-4FT/FF/30/25/18/YDM 8XX(A3+B3)	3350	25	134	835-850	
		3375	25	135		
		3400	25	136		
		2484	18	138		
	ETLSN-N-4FT/FF/30/25/18/YDM 8XX(A3+B3)	2502	18	139	835-850	
		2520	18	140		
ETLSN-N-4FT/FH/45/38/34/YDM 8XX (A3+B3)		5895	45	131		835-850
		5940	45	132		
		5985	45	133		
	ETLSN-N-4FT/FH/45/38/34/YDM 8XX (A3+B3)	5206	38	137	835-850	
		5244	38	138		
		5282	38	139		
		4760	34	140		
	ETLSN-N-4FT/FH/45/38/34/YDM 8XX (A3+B3)	4794	34	141	835-850	
		4828	34	142		
ETLSN-N-8FT/FF/54/46/38/YDM 8XX(A3+B3)		7020	54	130		835-850
		7074	54	131		
		7128	54	132		
	ETLSN-N-8FT/FF/54/46/38/YDM 8XX(A3+B3)	6164	46	134	835-850	
		6210	46	135		
		6254	46	136		
		5244	38	138		
	ETLSN-N-8FT/FF/54/46/38/YDM 8XX(A3+B3)	5282	38	139	835-850	
		5320	38	140		
ETLSN-N-8FT/FH/90/75/65/YDM 8XX (A3+B3)		11790	90	131		835-850
		11880	90	132		
		11970	90	133		
	ETLSN-N-8FT/FH/90/75/65/YDM 8XX (A3+B3)	10275	75	137	835-850	
		10350	75	138		
		10425	75	139		
		9100	65	140		
	ETLSN-N-8FT/FH/90/75/65/YDM 8XX (A3+B3)	9165	65	141	835-850	
		9230	65	142		

