





COLOR/WATTAGE SELECTION

1213/47.8" X 301/11.9"




COLOR/WATTAGE SELECTION

603/23.7" X 603/23.7"

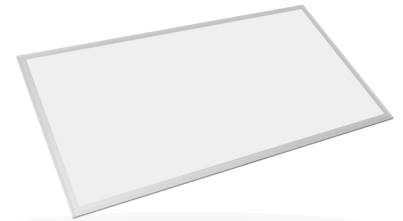

COLOR/WATTAGE SELECTION

1213/47.8" X 603/23.7"

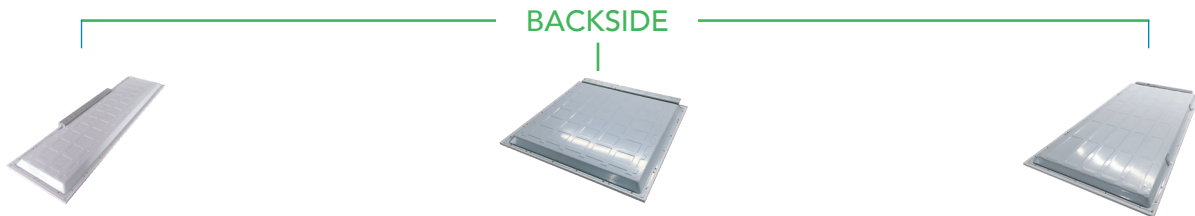

PRODUCT FEATURES

The new Architectural ETLPZ-LED fixture adopts the latest in optical and LED technology for use in many commercial applications. The ETLPZ -LED provides a single pleasant volumetric soft light that fills any interior space, giving it a larger, brighter, and more productive ambiance.

MOUNTING

- Surface Mounting
- Recessed lighting fixture

WARRANTY

- 10-year warranty

RATED LIFE

- More than 100K hours per L70 TM-21 @ 70 °C

APPLICATIONS

- Offices
- Hallways
- Multipurpose Rooms
- Conference Rooms
- Supermarkets


RATINGS

- DLC Listed
- UL 1598 suitable for damp locations, Type IC
- UL 8750 LED equipment in Lighting Products
- Temperature Rated at (-20°C to +45°C) (-4°F to 113°F)
- The 0-10V Dimming type is continuous
- The product can dim to 10%



ORDERING INFORMATION


ETLPZ	14	DJ	28	YDM	OP
Series	Size	Module Type	Number	Dimming	Lens
ETLPZ=LED Panel Z	14 22 24	DJ DB DC DD DE DF	XX can be any data	YDM=0-10V Dimming	FL=FROSTED LENS
	CCT	8XX	Ax	By	
Voltage	Color Temp	Color Temp	LED Driver	LEDS Package	
Blank=120-277 120-347 347S	White Turnable	835-850	A6=XZ	B4=2835	

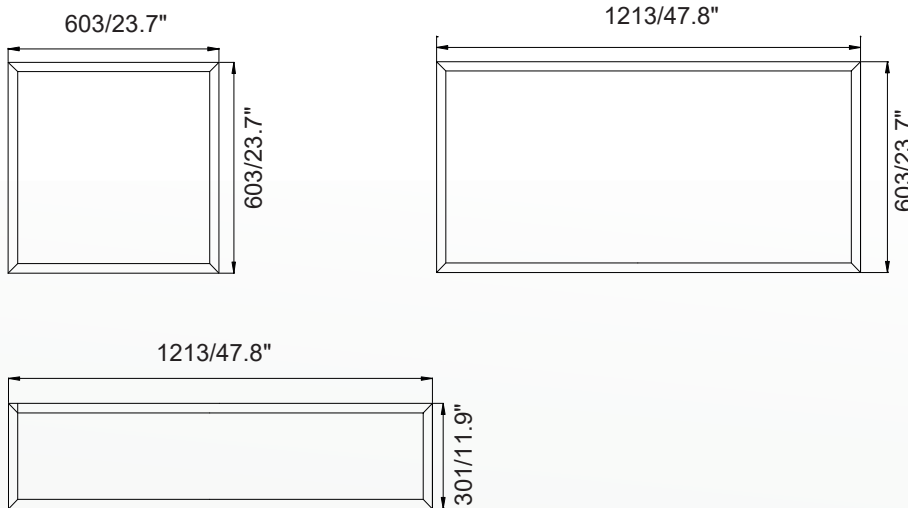DIMENSIONS: MM

Specifications:
ETLPZ-22/24

Length: 603/1213 (23.7"/47.8")
 Width: 603 (23.7")
 Depth: 41 (1.6")
 Weight: 2.62/4.18 (kg)

Specifications:
ETLPZ-14

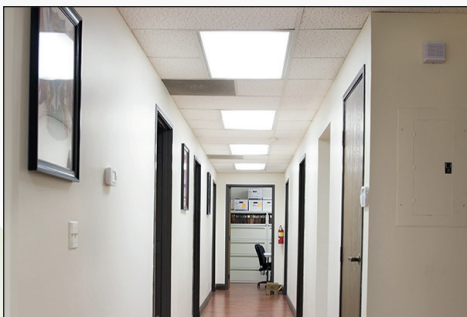Length: 1213 (47.8")
 Width: 301 (11.9")
 Depth: 41 (1.6")
 Weight: 2.01 (kg)





PHOTOMETRIC TEST LIST

Catalog No.	Lumens Rated	Watts Rated	Efficacy Rated
ETLPZ-14/DJ/28/YDM 835 (A6+B4)	3500	28	125
ETLPZ-14/DJ/28/YDM 840 (A6+B4)	3528	28	126
ETLPZ-14/DJ/28/YDM 850 (A6+B4)	3556	28	127
ETLPZ-14/DJ/32/YDM 835 (A6+B4)	4000	32	125
ETLPZ-14/DJ/32/YDM 840 (A6+B4)	4032	32	126
ETLPZ-14/DJ/32/YDM 850 (A6+B4)	4064	32	127
ETLPZ-22/DC/28/YDM 835 (A6+B4)	3500	28	125
ETLPZ-22/DC/28/YDM 840 (A6+B4)	3528	28	126
ETLPZ-22/DC/28/YDM 850 (A6+B4)	3556	28	127
ETLPZ-22/DD/36/YDM 835 (A6+B4)	4500	36	125
ETLPZ-22/DD/36/YDM 840 (A6+B4)	4536	36	126
ETLPZ-22/DD/36/YDM 850 (A6+B4)	4572	36	127
ETLPZ-24/DE/36/YDM 835 (A6+B4)	4500	36	125
ETLPZ-24/DE/36/YDM 835 (A6+B4)	4536	36	126
ETLPZ-24/DE/36/YDM 835 (A6+B4)	4572	36	127
ETLPZ-24/DE/36/YDM 835 (A6W+B4)	4500	36	125
ETLPZ-24/DE/36/YDM 835 (A6W+B4)	4536	36	126
ETLPZ-24/DE/36/YDM 835 (A6W+B4)	4572	36	127
ETLPZ-24/DE/40/YDM 835 (A6+B4)	5000	40	125
ETLPZ-24/DE/40/YDM 840 (A6+B4)	5040	40	126
ETLPZ-24/DE/40/YDM 850 (A6+B4)	5080	40	127
ETLPZ-24/DF/46/YDM 835 (A6+B4)	5750	46	125
ETLPZ-24/DF/46/YDM 840 (A6+B4)	5796	46	126
ETLPZ-24/DF/46/YDM 850 (A6+B4)	5842	46	127

Catalog No.	Lumens Rated	Watts Rated	Efficacy Rated
ETLPZ-14/DD/30/YDM 835(A6+B4)	3300	30	110
ETLPZ-14/DD/30/YDM 840(A6+B4)	3330	30	111
ETLPZ-14/DD/30/YDM 850(A6+B4)	3360	30	112
ETLPZ-22/DB/30/YDM 835(A6+B4)	3300	30	110
ETLPZ-22/DB/30/YDM 840(A6+B4)	3330	30	111
ETLPZ-22/DB/30/YDM 850(A6+B4)	3360	30	112
ETLPZ-22/DB/40/YDM 835(A6+B4)	4400	40	110
ETLPZ-22/DB/40/YDM 840(A6+B4)	4440	40	111
ETLPZ-22/DB/40/YDM 850(A6+B4)	4480	40	112
ETLPZ-22/DB/40/YDM 835(A6W+B4)	4400	40	110
ETLPZ-22/DB/40/YDM 840(A6W+B4)	4440	40	111
ETLPZ-22/DB/40/YDM 850(A6W+B4)	4480	40	112
ETLPZ-22/DB/40/YDM 865(A6W+B4)	4280	40	107
ETLPZ-24/DD/40/YDM 835(A6+B4)	4400	40	110
ETLPZ-24/DD/40/YDM 840(A6+B4)	4440	40	111
ETLPZ-24/DD/40/YDM 850(A6+B4)	4480	40	112
ETLPZ-24/DD/50/YDM 835(A6+B4)	5500	50	110
ETLPZ-24/DD/50/YDM 840(A6+B4)	5550	50	111
ETLPZ-24/DD/50/YDM 850(A6+B4)	5600	50	112
ETLPZ-24/DD/50/YDM 835(A6W+B4)	5500	50	110
ETLPZ-24/DD/50/YDM 840(A6W+B4)	5550	50	111
ETLPZ-24/DD/50/YDM 850(A6W+B4)	5600	50	112
ETLPZ-24/DD/50/YDM 865(A6W+B4)	5500	50	110





Catalog No.	Lumens Rated	Watts Rated	Efficacy Rated	CCT Range	
ETLPZ-14/DF/40/30/25/YDM/CCT 8XX(A6+B4)	4400	40	110	835-850	
	4440	40	111		
	4480	40	112		
	ETLPZ-14/DF/40/30/25/YDM/CCT 8XX(A6+B4)	3390	30	113	835-850
		3420	30	114	
		3450	30	115	
		2900	25	116	835-850
		2925	25	117	
		2950	25	118	
ETLPZ-22/DB/40/30/25/YDM/CCT 8XX(A6+B4)	4400	40	110	835-850	
	4440	40	111		
	4480	40	112		
	ETLPZ-22/DB/40/30/25/YDM/CCT 8XX(A6+B4)	3390	30	113	835-850
		3420	30	114	
		3450	30	115	
		2900	25	116	835-850
		2925	25	117	
		2950	25	118	
ETLPZ-24/DD/50/40/30/YDM/CCT 8XX(A6+B4)	5500	50	110	835-850	
	5550	50	111		
	5600	50	112		
	ETLPZ-24/DD/50/40/30/YDM/CCT 8XX(A6+B4)	4520	40	113	835-850
		4560	40	114	
		4600	40	115	
		3480	30	116	835-850
		3510	30	117	
		3540	30	118	

