



PRODUCT FEATURES

ETLDP Fixtures are designed to save energy and meet low light egress requirements. Also the fixture is optimal for parking driver lane compliance. For use s as utility lighting, parking garage and stairwell lighting where meets applicable buliding and safety codes.

MOUNTING

- V-Hook ready
- Surface Mounting

WARRANTY

- 10-year warranty

APPLICATIONS

- Offices
- Hallways
- Multipurpose Rooms
- Conference Rooms

RATINGS

- DLC Listed
- UL 1598 suitable for wet locations
- UL 8750 LED equipment in Lighting Products Ambient temperatures rated for -40°C to 40°C when fixture is surface mounted ,or up to 45°C when fixture is suspended at least 18" from ceiling
- The 0-10V Dimming type is continuous
- The product can dim to 10%





ORDERING INFORMATION

ETLPZ	4FT	1L	NJ	34/30/25	YDM	OP
Series	Size	Module	Module Type	Number	Dimming	Lens
ETLDP=LED Vapor Tight	4FT	1L	NJ NL	YY can be any data	YDM=0-10V Dimming NDM=NONE Dimming	FL=FROSTED LENS



	CCT	8XX	Ax	By	CzCz	EM
Voltage		Color Temp	LED Driver	LEDS Package	Sensor	Battery Back-Up
BLANK=120-277 120-347 347S	WHITE TUNABLE	835-850	A3=Simon	B3=SEOUL 3528	BLANK=NO SENSOR C1=HYTRONIK HC403V-RC	BLANK=NO EM EM

ETLDP-2FT/1L/TE/20/YDM 840 (A3+B3+C1+EM)

ETLPZ	2FT	1L	TE	20	YDM	OP
Series	Size	Module	Module Type	Number	Dimming	Lens
ETLDP=LED Vapor Tight	2FT 4FT	1L	TE FG FJ FL FN FR	XX can be any data	YDM=0-10V Dimming NDM=NONE Dimming	FL=FROSTED LENS

	840	Ax	By	Cz (OP)	EM	
Voltage	Color Temp	LED Driver	LEDS Package	Sensor	Battery Back-Up	Shielding
BLANK=120-277 120-347 347S	8355 840 850	A3=Simon	B3=SEOUL 3528	BLANK=NO SENSOR C1=HYTRONIK HC403V-RC	BLANK=NO EM EM	V-Hook Surface

DIMENSIONS: MM

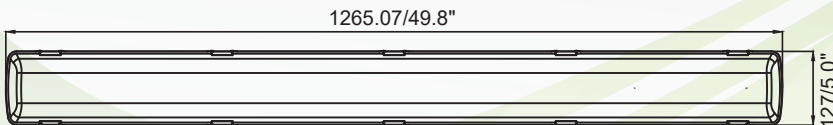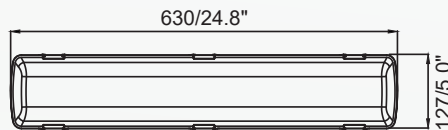

Specifications

ETLDP- 2FT/4FT

Length:630/1265.07(24.8"/49.8")

Width: 127(5.0")

Depth:88.1(3.5")

Weight:1.4/2.70 (kg)





ORDERING INFORMATION

Catalog No.	Lumens Rated	Watts Rated	Efficacy Rated	CCT Range	
ETLDP-4FT/1L/NJ/34/30/25/YDM/CCT 8XX (A3+B3)	4556	34	134	835-850	
	4590	34	135		
	4624	34	136		
	ETLDP-4FT/1L/NL/45/38/34/YDM/CCT 8XX (A3+B3)	4020	30	134	835-850
		4050	30	135	
		4080	30	136	
		3350	25	134	835-850
		3375	25	135	
		3400	25	136	
ETLDP-4FT/1L/NL/45/38/34/YDM/CCT 8XX (A3+B3)	6030	45	134	835-850	
	6075	45	135		
	6120	45	136		
	ETLDP-4FT/1L/NL/45/38/34/YDM/CCT 8XX (A3+B3)	5092	38	134	835-850
		5130	38	135	
		5168	38	136	
		4556	34	134	835-850
		4590	34	135	
		4624	34	136	





ORDERING INFORMATION

Catalog No.	Lumens Rated	Watts Rated	Efficacy Rated
ETLDP-2FT/1L/TE/20/YDM	2660	20	133
ETLDP-2FT/1L/TE/20/YDM	2680	20	134
ETLDP-2FT/1L/TE/20/YDM	2700	20	135
ETLDP-4FT/1L/FG/25/YDM	3325	25	133
ETLDP-4FT/1L/FG/25/YDM	3350	25	134
ETLDP-4FT/1L/FG/25/YDM	3375	25	135
ETLDP-4FT/1L/FJ/34/YDM	4522	34	133
ETLDP-4FT/1L/FJ/34/YDM	4556	34	134
ETLDP-4FT/1L/FJ/34/YDM	4590	34	135
ETLDP-4FT/1L/FJ/38/YDM	5054	38	133
ETLDP-4FT/1L/FJ/38/YDM	5092	38	134
ETLDP-4FT/1L/FJ/38/YDM	5130	38	135
ETLDP-4FT/1L/FL/45/YDM	5985	45	133
ETLDP-4FT/1L/FL/45/YDM	6030	45	134
ETLDP-4FT/1L/FL/45/YDM	6075	45	135
ETLDP-4FT/1L/FN/52/YDM	6916	52	133
ETLDP-4FT/1L/FN/52/YDM	6968	52	134
ETLDP-4FT/1L/FN/52/YDM	7124	52	137
ETLDP-4FT/1L/FR/65/YDM	8580	65	132
ETLDP-4FT/1L/FR/65/YDM	8710	65	134
ETLDP-4FT/1L/FR/65/YDM	8775	65	135
ETLDP-4FT/1L/FJ/34/YDM/120-347 835(A3+B3)	4556	34	134
ETLDP-4FT/1L/FJ/34/YDM/120-347 840(A3+B3)	4590	34	135
ETLDP-4FT/1L/FJ/34/YDM/120-347 850(A3+B3)	4624	34	136
ETLDP-4FT/1L/FN/52/YDM/120-347 835(A3+B3)	7020	52	135
ETLDP-4FT/1L/FN/52/YDM/120-347 840(A3+B3)	7072	52	136
ETLDP-4FT/1L/FN/52/YDM/120-347 850(A3+B3)	7124	52	137

