

# LED TRADITIONAL WALL PACK - TUNABLE

TS-WP15GM-60/80/100W-X-TP-50K



LED LIGHT SOURCE

10 YEAR WARRANTY

## A variety of drivers are available

Using an isolated, 1-10V dimmable.

## Protection level: Wet Location

The wall pack is sealed with a silicon ring, allowing for full dust and water proofing. The internal levels ensures that the installation is always accurately horizontal.



## PRODUCT DIMENSION

Power	60W	80W	100W
Rate Current	0.55A	0.734A	0.971A
Watt Adjustable	60-40-20W	80-60-40W	100-80-60W
Working Vol	AC120-277V		
Beam Angle	70°*110°		
Color Temp	3000K, 4000K, 5000K		
Efficiency	141 LPW		
Color Rendeering Index	Ra>70		
Operating Temp	-40°F~ +104°F		
Storage Temp	-40°F~ +158°F		
Environment Location	Wet Location		
Life-Span	65,000		
Material	ADC12		
Lamp Shell Color	Brown		
Mounting	Bracket fixed		
Dimming	0-10V dimming standard		



# LED TRADITIONAL WALL PACK - TUNABLE


TS-WP15GM-60/80/100W-X-TP-50K




LED LIGHT SOURCE

10 YEAR WARRANTY

## OPTICAL PROPERTIES

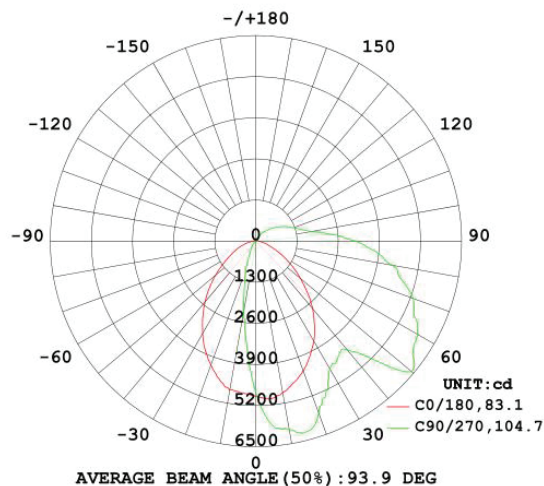

## PRODUCT DIMENSION

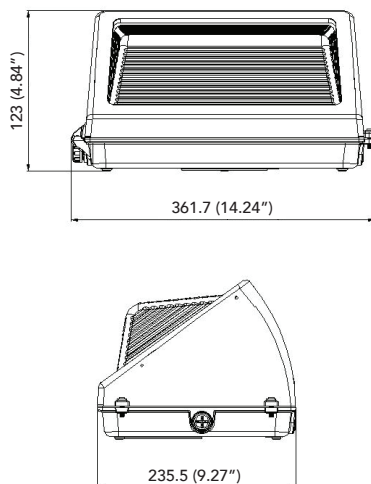

## PACKING/WEIGHT

Power	Outer Box (L*W*H)	Qty/Ctn (pcs)	N.W/Ctn (lbs/kg)	G.W/Ctn (lbs/kg)	Remarks
60W	14.57" * 11.81" * 6.69" 370*300*170mm	1	7.05/3.2	9.48/4.3	0.15M cable
80W			7.05/3.2	9.48/4.3	
100W			7.17/3.25	10.14/4.6	



RoHS



# LED TRADITIONAL WALL PACK - TUNABLE

TS-WP15GM-60/80/100W-X-TP-50K




LED LIGHT SOURCE


10 YEAR WARRANTY

## INSTALLATION INSTRUCTION


1. Remove the rubber plug.




2. Remove the screws from the top cover.




3. Open the lid.

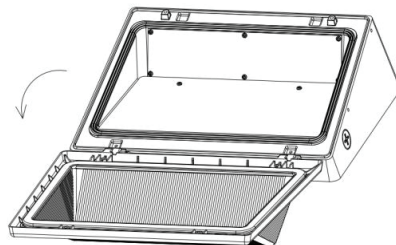



4. Remove the reflector.

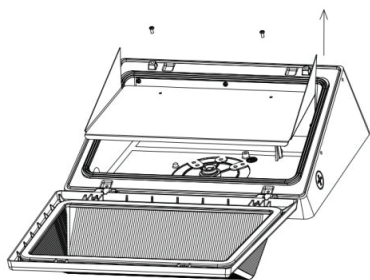


5. Fixed according to traditional installation method.

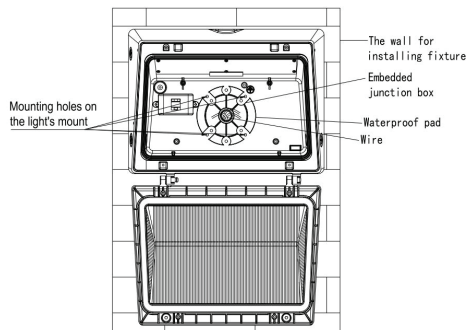


6. Connect the mains supply to the drive harness as shown in the figure, Adjust the CCT and power to the required gear



7. Installing the reflector.



8. Install the cap screws and rubber plugs.



9. Installation completed.

