

LED UFO HIGH BAY PRO - TUNABLE

UHB12XX-XXXW-110-X



LED LIGHT SOURCE

10 YEAR WARRANTY


FEATURES

1. Advanced fin design with adjacent holes and grooves in each fin, for exceptional heat dissipation.
2. Input voltage range AC120V-277V, AC277V-480V (1-10V dimming).
3. Uniform light distribution, high light reflectivity, 110/90/60 beam angle available. Lens pass rate over 90%.
4. Light weight and durable.



APPLICATION





Workshops, Warehouses, Supermarkets,
Gas Stations, Stadiums.




COLOR/WATTAGE SELECTION

PRODUCT DIMENSIONS





Unit: mm



Rings:



Hook:



150W

200W

240W

300W



LED UFO HIGH BAY PRO - TUNABLE

UHB12XX-XXXW-110-X



LED LIGHT SOURCE

10 YEAR WARRANTY

LIGHTING PARAMETERS

Model No.	UHB1210-150W-110-X-XXK(XX)	UHB1215-200W-110-X-XXK(XX)	UHB1220-240W-110-X-XXK(XX)	UHB1224-300W-110-X-XXK(XX)
Wattage	150W	200W	240W	300W
Working Vol	AC 120-277V, 277-480V			
CCT	35000K, 4000K, 5000K, 5700K, 6500K			
Lamp Bead Model	2835			
Driver	Fahold & SOSEN			
Beam Angle	110°			
Lighting Efficiency	155 LPW			
Color Rendering	Ra>80			
Operating Temp	-40°F~-113°F -40°C~45°C			
Storage Temp	-40°F~158°F -40°C~70°C			
Environment	Wet Location			
Warranty / Life Span	10 Year / 65,000 H			
Lamp Shell	Black			

PACKING INFORMATION

Power	Outer Box (L x W x H)	Qty/Ctn (pcs)	N.W./Ctn (lbs)	G.W./Ctn (lbs)	
150W	12.01"x12.01"x6.89" (305*305*175mm)	1	1.75/3.56	2.75/6.06	2M cable
200W	14.49"x14.49"x6.97" (368*368*177mm)	1	2.10/4.63	3.25/7.17	
240W	15.43"x15.43"x7.09" (392*392*180mm)	1	2.50/5.51	3.72/8.20	
300W	16.46"x16.46"x7.17" (418*418*182mm)	1	2.80/6.17	4.05/8.93	



LED UFO HIGH BAY PRO - TUNABLE

UHB12XX-XXXW-110-X




LED LIGHT SOURCE


10 YEAR WARRANTY

INSTALLATION INSTRUCTION

1. Rings type:

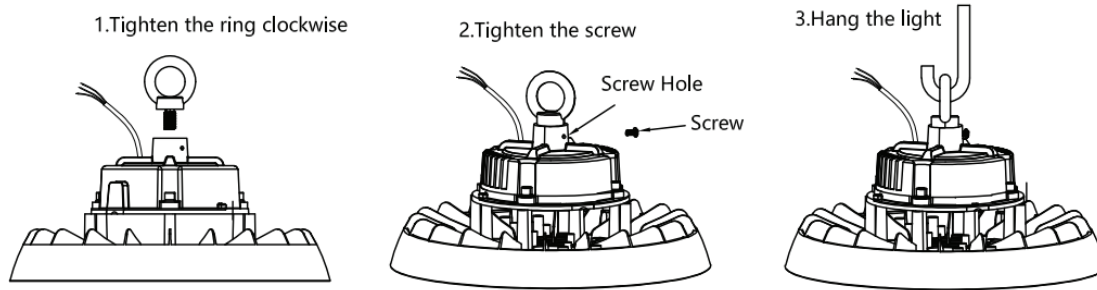

2. Hook type:

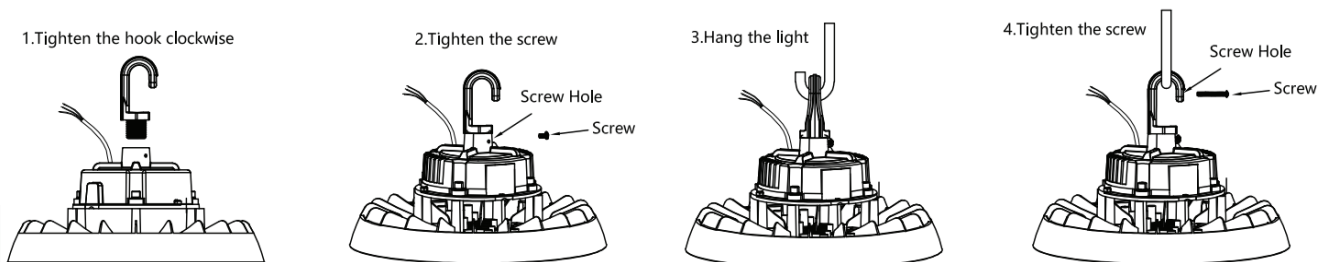

WIRING CONNECTION

Turn off the power, connect AC wire, Black wire to L, white wire to N, and green to E.

1. Compatible with 1-10V dimming.

2. Connect wires as below, purple wire is D+ gray wire is D-, cap black wire.

