

WATTAGES: 150/120/100W, 240/200/150W, 300/240/200W, 500/400/300W Tunable



A unique feature for this fixture is the quick disconnected cable, it can quickly separate the driver from the LED module for easy maintenance. The unit has built-in heat sink and comes with a hook made of die-cast aluminum for a strong and easy installation.

FEATURES:

- DLC 6.0 Premium with high luminous efficiency and low UGR.
- Simple and stylish appearance.
- Excellent heating dissipation.
- Branded driver and LED's.
- Microwave Sensor, PIR Motion sensor, Motion Sensor with Bluetooth.
- Very complete accessories for option.
- 0-10V dimming.


PRODUCT PARAMETERS:

SPECIFICATION				
MODEL	SS-UFO12-150W-H-TCP	SS-UFO12-240W-H-TCP	SS-UFO12-300W-H-TCP	SS-UFO12-500W-H-TCP
WATTAGE	150/120/100W	240/200/150W	300/240/200W	500/400/300W
LUMEN	22500/18000/15000	100800/48000/31500	90000/72000/60000	250000/200000/150000
EFFICACY	150LPW			
CCT	3500K/4000K/5000K Tunable			
LAMP BEAD MODEL	2835			
DRIVER	SOSEN			
CRI	70/80			
INPUT VOLTAGE	AC120-277V, AC 277-480V			
LIGHTING ANGLE	90°			
OPERATING TEMPERATURE	-40°F~113°F			
STORAGE TEMPERATURE	-40°F~158°F			
PF	>0.9			
DRIVER EFFICIENCY	>90%			
PROTECTION LEVEL	WET			
LIFE TIME	>50000 hours			
WARRANTY	5 years limited			

WATTAGES: 150/120/100W, 240/200/150W, 300/240/200W, 500/400/300W Tunable

PRODUCT DIMENSION

• Hook type(Standard):

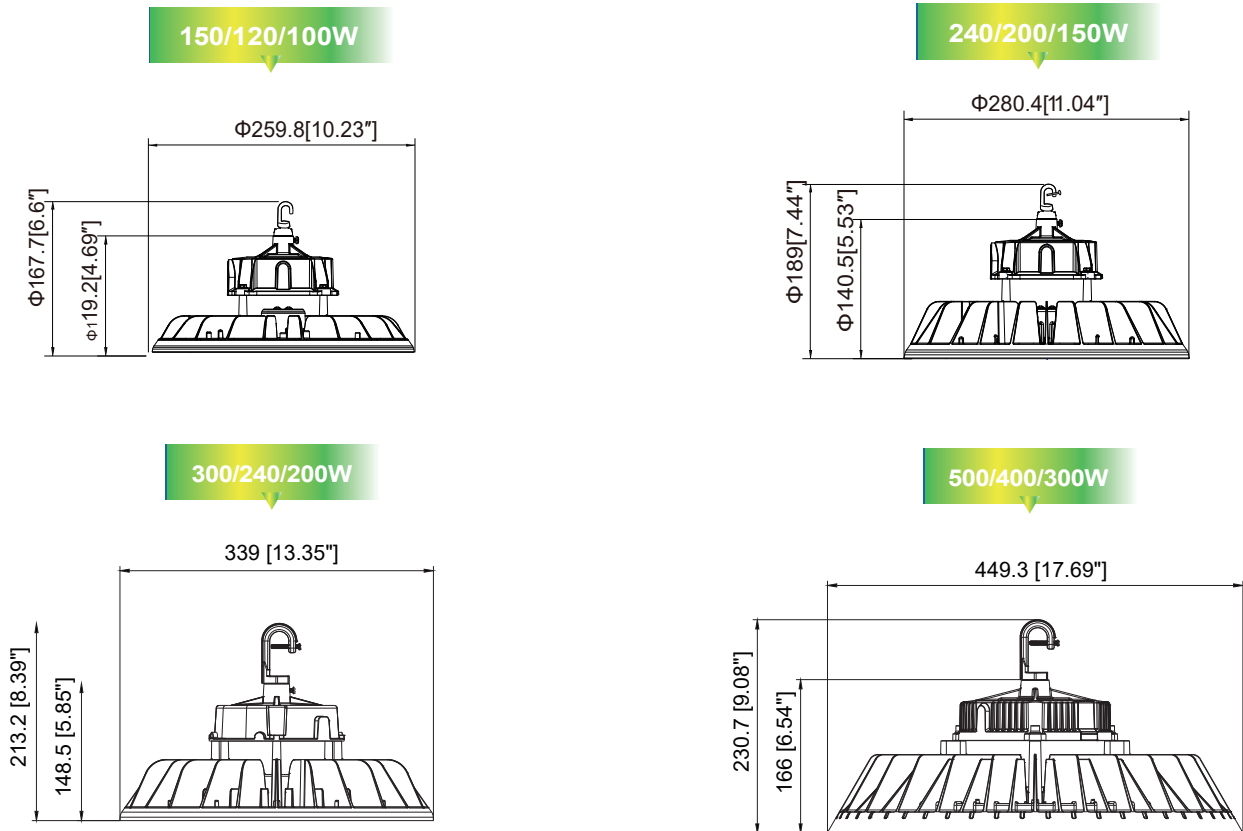

PACKING INFORMATION

	Packing	Size	Net Weight	Gross Weight	pcs/ctn
150/120/100W	Outer Packing Size	L10.59xW10.59xH5.63 inch L269xW269xH143 mm	3.47Lbs(1.5Kg)	4.41Lbs(2Kg)	1pcs/ctn
240/200/150W	Outer Packing Size	L11.38xW11.38xH6.38 inch L289xW289xH162 mm	4.78Lbs(2.17Kg)	5.89Lbs(2.67Kg)	1pcs/ctn
300/240/200W	Outer Packing Size	L15.16xW15.16xH7.48 inch L385xW385xH190 mm	6.97Lbs(3.16Kg)	8.83Lbs(4.01Kg)	1pcs/ctn
500/400/300W	Outer Packing Size	L20.28xW20.28xH8.66 inch L515xW515xH220 mm	13.85Lbs(6.28Kg)	16.76Lbs(4.5Kg)	1pcs/ctn

TUNABLE LED UFO High Bay(UFO12)

WATTAGES: 150/120/100W, 240/200/150W, 300/240/200W, 500/400/300W Tunable

CCT AND POWER SELECTABLE:



MOUNTING BRACKETS:



ACCESSORIES (SOLD SEPARATELY):



WATTAGES: 150/120/100W, 240/200/150W, 300/240/200W, 500/400/300W Tunable

ORDERING GUIDE:


EXAMPLE:

SS-UFO12-150W-H-TCP-[A,B,C,D,blank]

SS	UFO	150W	H	xx	TCP	Y
COMPANY	PRODUCT	POWER	HIGH LUMENS	INPUT VOLTAGE	CCT	CONTROL
Starlake	UFO Highbay	150=150/120/100W 240=240/200/150W 300=300/240/200W 500=500/400/300W		Blank=120-277Vac HV=277-480Vac	TCP = adjust color temperature and wattage.	A: PIR sensor (Infrared sensor) B: MS sensor (occupancy sensor) C: BRT sensor (occupancy+bluetooth) D: PHB sensor (Infrared bluetooth) Blank: no provide sensor


DISTRIBUTION

SS-UFO12-150W-H-TCP-[A,B,C,D,blank](150W-5000K)

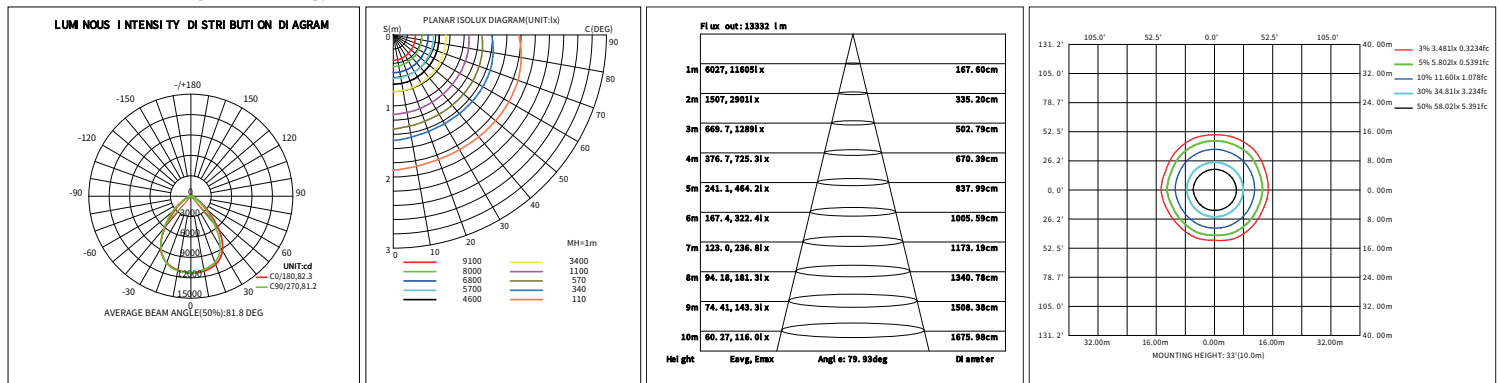


For complete IES files, please visit our website.

SS-UFO12-200W-H-TCP-[A,B,C,D,blank](200W-5000K)

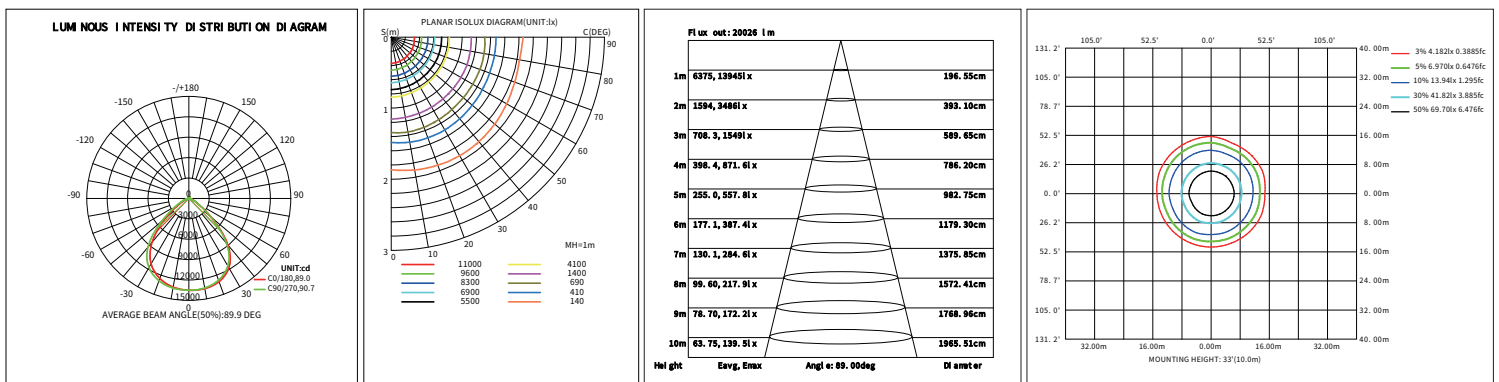


SS-UFO12-240W-H-TCP-[A,B,C,D,blank](240W-5000K)

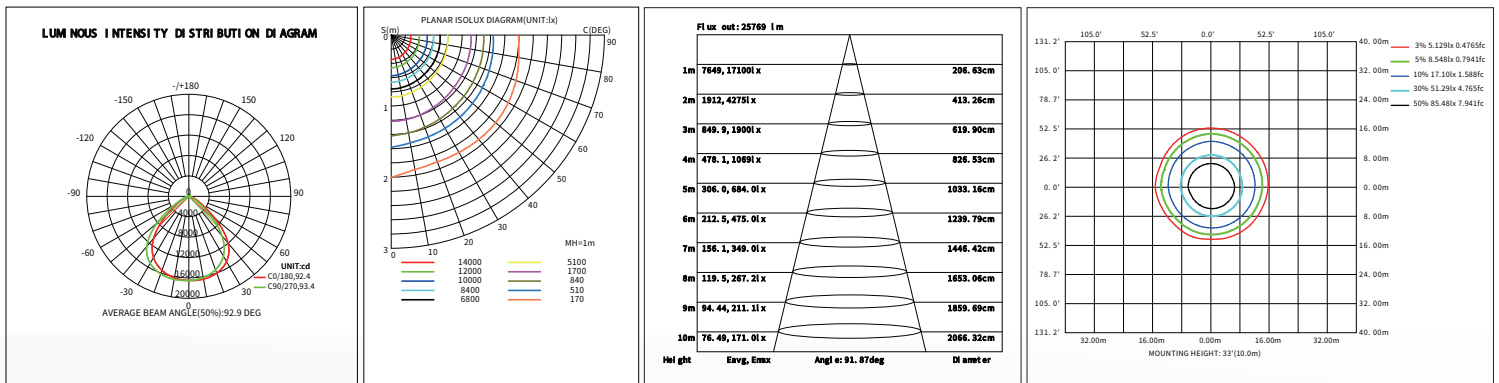


WATTAGES: 150/120/100W, 240/200/150W, 300/240/200W, 500/400/300W Tunable

SS-UFO12-300W-H-TCP-[A,B,C,D,blank](300W-5000K)

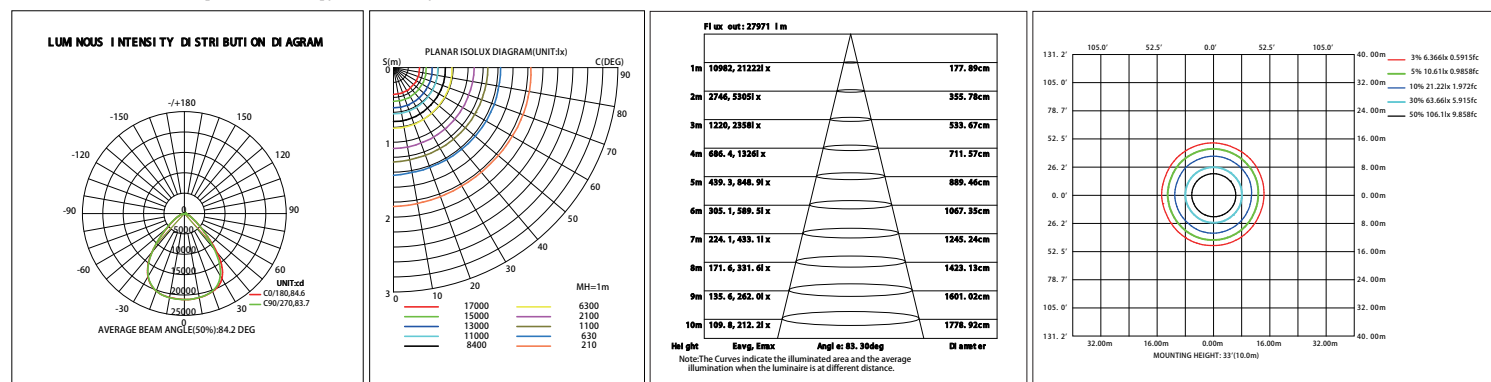


SS-UFO12-500W-H-TCP-[A,B,C,D,blank](500W-5000K)

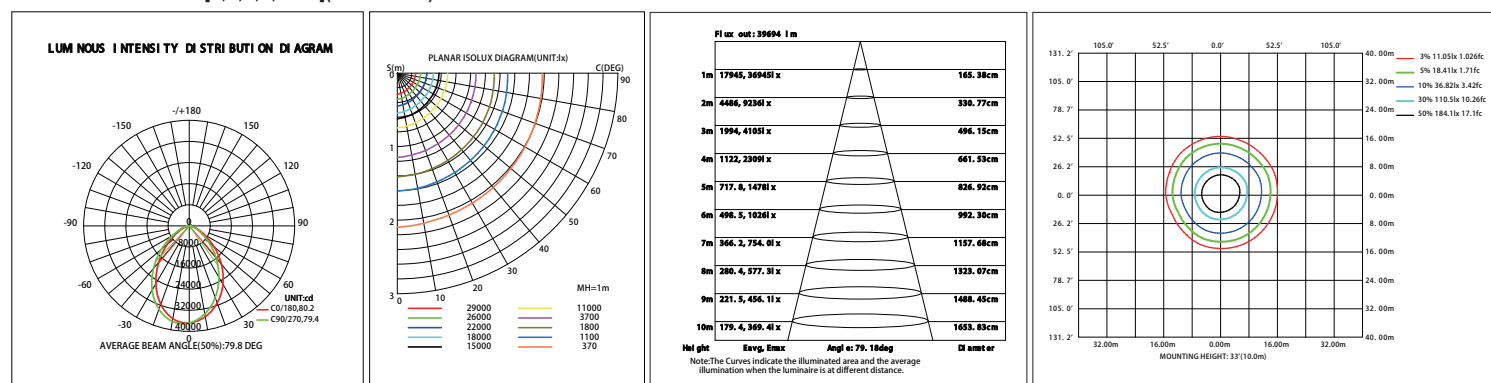


INSTALLTION INSTRUCTION:

1.Hook type:

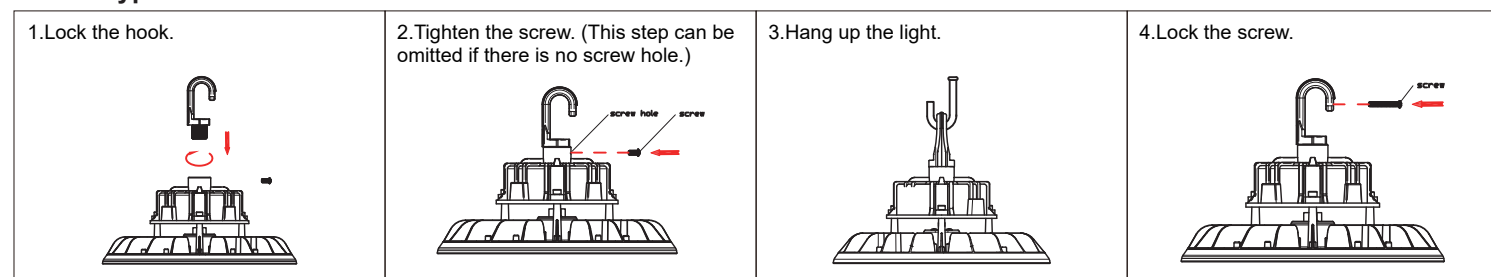


2.YOKE type:

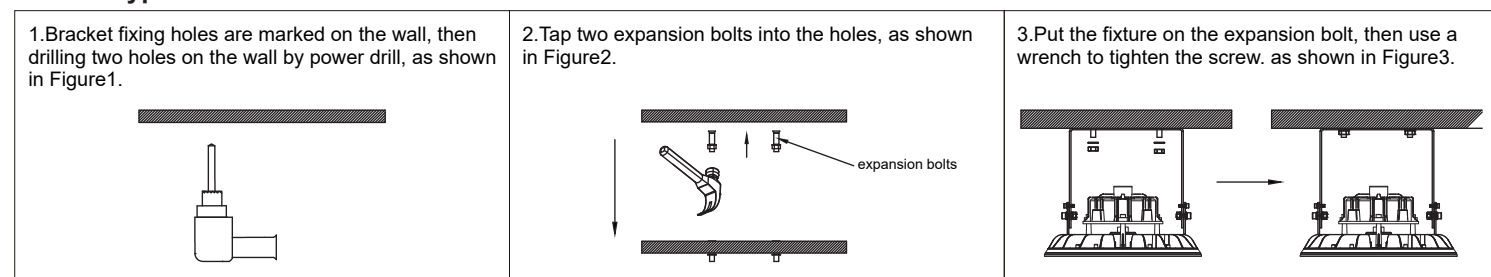

WATTAGES: 150/120/100W, 240/200/150W, 300/240/200W, 500/400/300W Tunable


3.Sensor installation:

1.Unscrew the plug screws using screws, as shown in Figure 1.

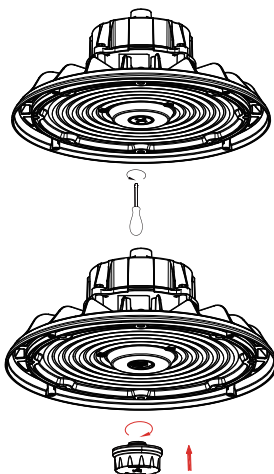

3.Screw the sensor into the base, as shown in Figure 3.

2.Remove the plug screw, as shown in Figure 2.

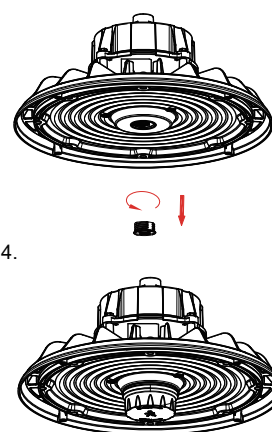

4.Sensor installation, as shown in Figure 4.


WIRING CONNECTION:

Turn off the power,connect AC wire.Black wire to L,white wire to N,and green wire to PE.

Dimmer connection(with dimmable driver.)

1. Compatible with 0-10V dimming.

2. Connect wires as below, Pink 0-10V Dimming purple wire is D+,pink wire is D-,cap red wire.

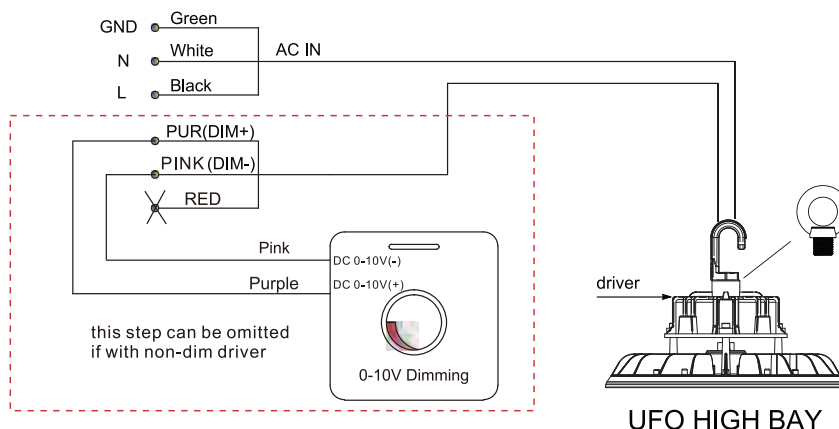

APPLICATIONS:

