


WATTAGES: 50W,100W Max Tunable



VAPOR series tri-proof light is designed for places requiring waterproof, dustproof and slight corrosion-resistant lighting, such as warehouse, parking lot, food factory, dust factory, cold storage etc. It can be used in places requiring corrosion-resistant lighting.



PRODUCT FEATURES


- Efficacy:130lm/w
- Input Voltage:120-277V
- Lumen Output: 6500 to 13000 Lumens
- Dimmable: 0-10V dimming
- Size: 4ft,8ft
- CCT: 3500/4000/5000/5700/6500K Selectable
- Rating: IP65
- MOUNTING: Aluminum Surface Mount Clips standard.
- OPTICS: Anti-UV Frosted Polycarbonate Lens standard.
- Certification: ETL DLC Premium List
- EMERGENCY: Installed 90 Minute Emergency Backup Battery LED Driver available.

PRODUCT PARAMETERS

SPECIFICATION		
Model Number	SS-VAP-F-50W-H-TCP	SS-VAP-E-100W-H-TCP
Wattage	50/40/35/30/25W	100/80/70/60/50W
Input Voltage	AC 120-277V	
CCT	3500K/4000K/5000K/5700/6500K Tunable	
Beam Angle	120°	
Dimming	0-10V	
EFFICACY	130lm/W	
CRI	Ra>80	
Operating Temperature	-40°F~113°F	
Storage Temperature	40°F~113°F	
Environment Location	Wet Location	
Life span	≥50000H	
Lamp	White	
WARRANTY	5 Year Limited	

WATTAGES: 50W,100W Max Tunable

PRODUCT DIMENSION

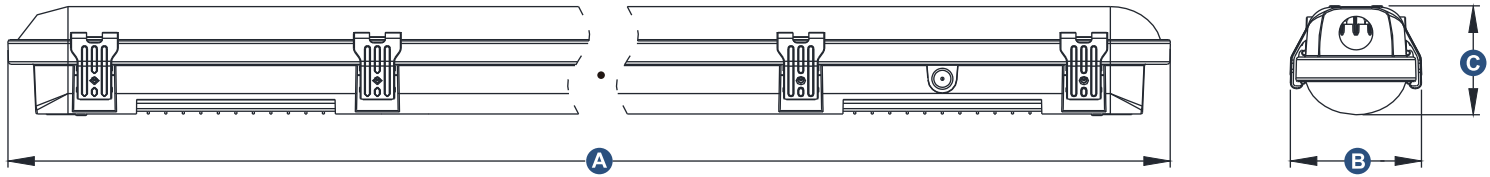

Specification	Power	A	B	C
4FT	50W	47.24"(1200mm)	3.74"(95mm)	3.15"(80mm)
8FT	100W	94.49"(2400mm)	3.74"(95mm)	3.15"(80mm)

PACKGING / WEIGHT

	Inner Packing Size	Outer Packing Size	Net Weight	Gross Weight	Qty
4FT	L25.59xW4.21xH4.02 inch L1265xW336xH386 mm	L49.80xW13.23xH15.20 inch L1265xW336xH386 mm	48.94Lbs(22.20Kg)	52.47Lbs(23.80Kg)	9
8FT	/	L96.26xW4.02xH4.21 inch L2445xW102xH107 mm	8.84Lbs(4.01Kg)	11.68Lbs(5.30Kg)	1

Standard Accessories



Surface Mount Clips

Product Accessories(SOLD SEPARATELY):



Suspension Kits



EM driver



Microwave motion sensor



Remote Controller

INSTALLATION REQUIREMENT

1. Power off before installation.
2. Thread the input cable through waterproof joint then combine the input thread and wiring terminals, and ensure reliable contact.
3. Tighten the knob bracket.
4. Ceiling installation: fix the ceiling bracket on the installation surface via self-tapping screws and flat gasket then snap the lamp body into bracket.


WATTAGES: 50W,100W Max Tunable

5 Power + 5 CCT selectable:
SS-VAP-T-25W-H-xx-TCP-y


SS	VAP	T	25W	H	xx	TCP	y
COMPANY	PRODUCT	SIZE	POWER	HIGH LUMENS	VOLTAGE	CCT	CONTROL
Starlake	Vapor Tight Light	F=4FT E=8FT	50W=50/40/35/30/25W 100W=100/80/70/60/50W		Blank=120-277VAC	3000K 4000K 5000K 5700K 6500K	S=PIR sensor(Occupancy); S=MS sensor(Occupancy); NC=Bluetooth sensor, E=Emergency; Blank=no provide sensor,

INSTALLATION DRAWING

Ceiling Installation

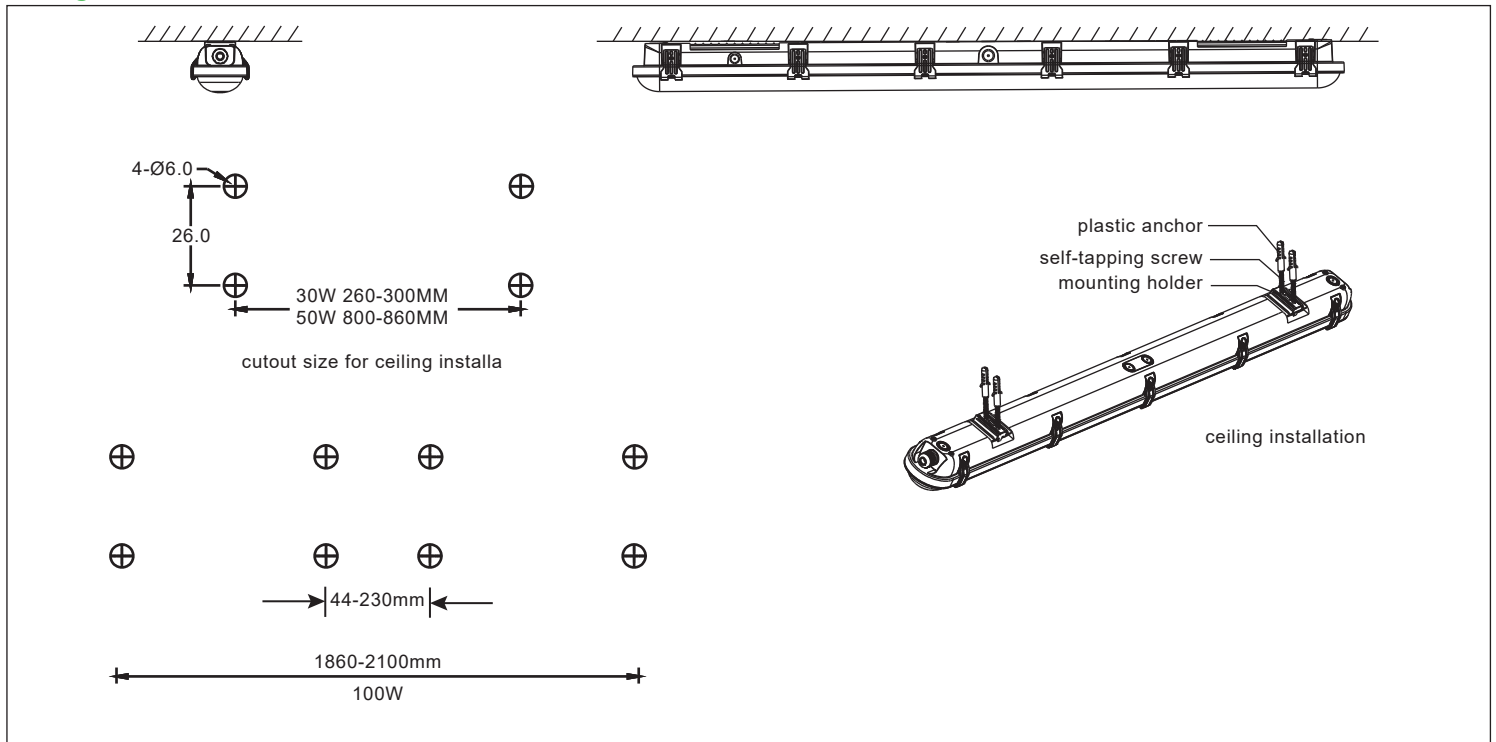


Suspending Installation

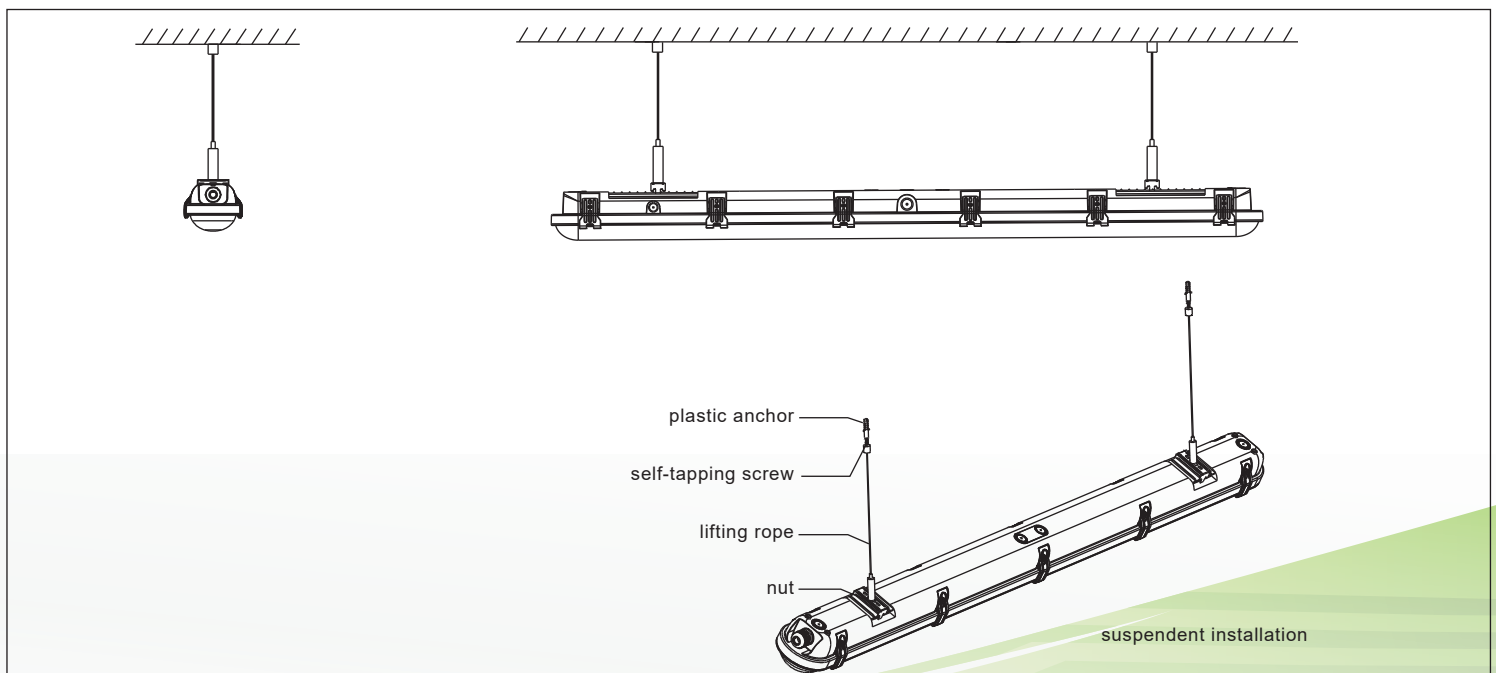

WATTAGES: 50W,100W Max Tunable

CONNECTION DIAGRAM

Refer To The Wiring Diagram For Wiring.

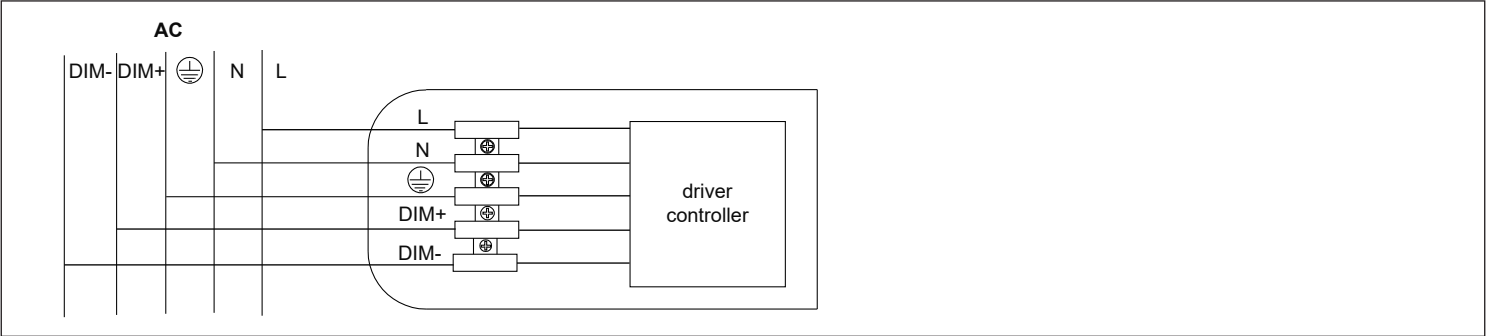

APPLICATION

