

LED BACK-LIT PANEL LIGHT

WATTAGES: 40W, 50W, 72W Max Tunable



New Generation produce industry-leading performance with deep energy savings and continuous dimming. The compact, slick profile produces uniform and glare free lumen output. Perfect application for retail stores, schools, offices, markets and restaurant.

Product Features:

• CONSTRUCTION

Durable solid frame, prefabricated paint with matte white finished. Slim profile design. Integrated T-Bar mounting clips built in onto the fixture. Easy installation.

• ELECTRICAL

Luminaire is built with the highest quality driver that is Universal Voltage(120V-277V & 120V-347V), uses long lasting, highly-efficient LED packages.

• DRIVER

Driver is fixed on the back of the panel or side to prevent mis-handling during shipment.

• OPTICAL SYSTEM

Back-lit optics produces uniform light output, diffuser lens reduces glare and improve overall energy efficiency.

• ENERGY SAVINGS

Over 50% energy savings than traditionally fluorescent fixtures, low heat productions requires less maintenance and operation cost.

• LISTING

ETL & UL Listed, FCC, RoHS.

• WARRANTY

5 Years Limited Warranty, Rated for 50,000 hours(Refer to your warranty documentation for more information.)

5 Power + 5 CCT selectable:

SPECIFICATION				
MODEL	SS-BPL14-TCP40W	SS-BPL22-TCP40W	SS-BPL24-TCP72W	SS-BPL24-TCP72W
WATTAGE	15/20/25/30/40W	15/20/25/30/40W	30/40/50/60/72W	30/40/50/60/72W
EFFICACY	135LPW to 145LPW			135LPW to 150LPW
CCT	3500/4000/5000/5700/6500K Selectable			
CRI	Ra 80			
INPUT VOLTAGE	AC120-277V			
POWER FACTOR	0.95			
DRIVER EFFICACY	90%			
DIMMING	0-10Vdc			
LIFE SPAN	over 50,000 hrs			
WORKING TEMPERATURE	-40°F ~113°F			
STORAGE TEMPERATURE	-40°F ~176°F			
OUTDOOR RATING	Damp			
WARRANTY	5 years limited			


LED BACK-LIT PANEL LIGHT

WATTAGES: 40W, 50W, 72W Max Tunable

Images:



Product Dimension:

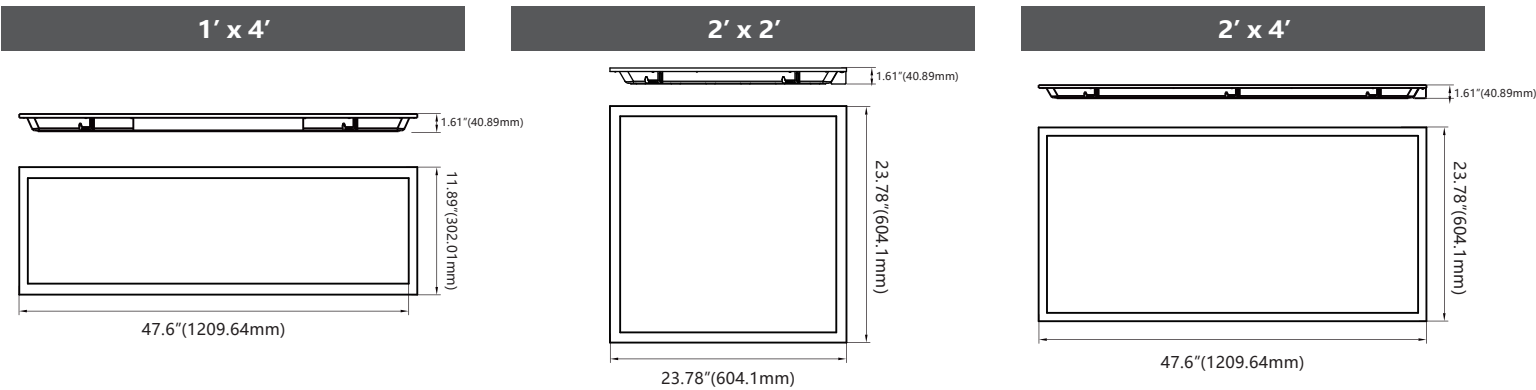

	Packing	Size	Net Weight	Gross Weight	pcs/ctn
1x4FT	Outer Packing Size	L48.82xW5.71xH12.99 inch L1240xW145xH330 mm	13.1Lbs(5.94Kg)	16.25Lbs(7.37Kg)	4pcs/ctn
2x2FT	Outer Packing Size	L24.80xW5.71xH24.80 inch L644xW145xH630 mm	13.49Lbs(6.12Kg)	16.47Lbs(7.47Kg)	4pcs/ctn
2x4FT	Outer Packing Size	L48.82"xW5.71"xH24.80 inch L1240xW145xH630 mm	27.87Lbs(12.64Kg)	33.11Lbs(15.02Kg)	4pcs/ctn

LED BACK-LIT PANEL LIGHT

WATTAGES: 40W, 50W, 72W Max Tunable

Dip Switch for Power and CCT:

5CCT Switchable



5 Wattage switchable

Multiple Sensor Solutions Available

Quick and Easy in-field installation of sensors.
(The sensor receptacle is pre-embedded in the profile frame.)



Product Accessories(SOLD SEPARATELY):



External Sensor



Surface Mount Kit



Flange Kit



Emergency Driver


WATTAGES: 40W, 50W, 72W Max Tunable

5 Power + 5 CCT selectable:
SS-BPL24-TCP72W-CCT-y-xx


SS	BPL	24	TCP72W	CCT	Y	xx
COMPANY	PRODUCT		POWER	CCT	CONTROL	INPUT VOLTAGE
Starlake	Panel Light	14=1*4' 22=2*2' 24=2*4'	TCP = Adjust color Temperature and Wattage 40W=15/20/25/30/40W 50W=25/30/35/40/50W 72W=30/40/50/60/72W		A: PIR sensor (Infrared sensor) B: MS sensor (occupancy sensor) BT:Bluetooth sensor Balk: no provide sensor	Blank=120-277Vac

DISTRIBUTION


SS-BPL14-TCP40W(40W, 5000K)

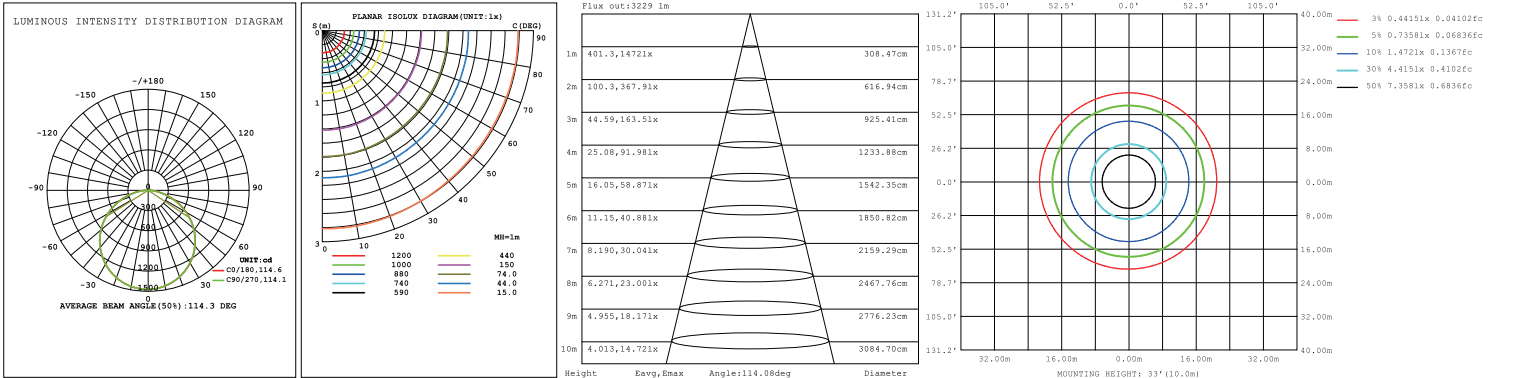

SS-BPL22-TCP40W(40W, 5000K)

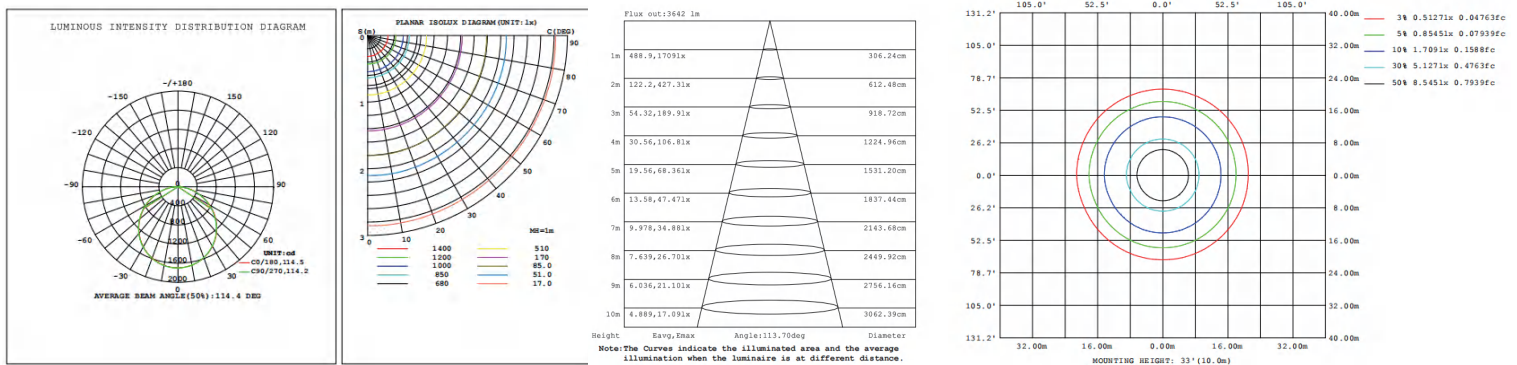


SS-BPL24-TCP50W(50W, 5000K)

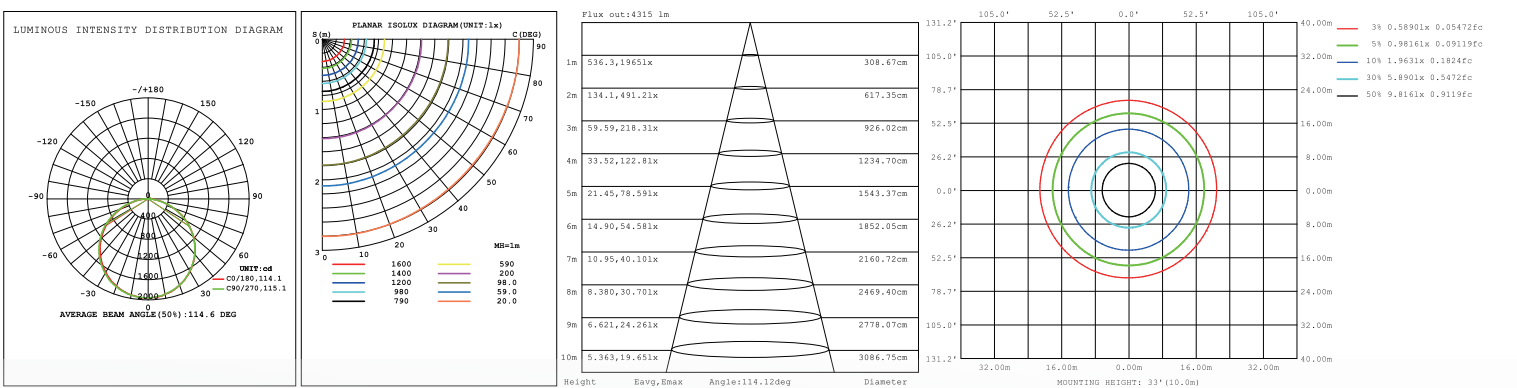

WATTAGES: 40W, 50W, 72W Max Tunable

SS-BPL24-TCP72W(72W, 5000K)

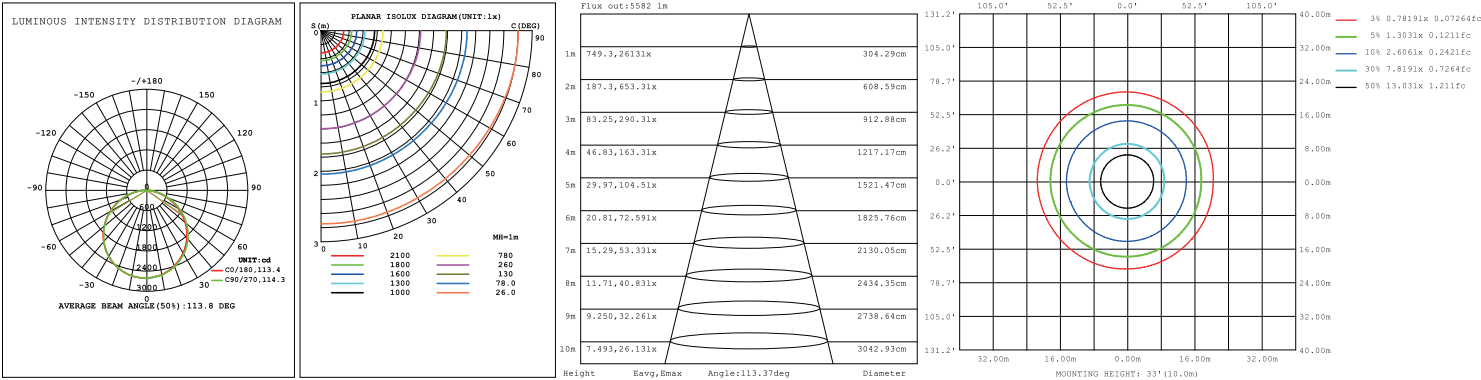

Applications

