

WATTAGES: 4FT/8FT, from 35W to 150W

Linear LED Strip Retrofit Kit



LED Strip Retrofit Kits are the great solution to replace outdated fluorescent strip fixtures into energy-saving, architectural grade, LED fixtures. You can expect 50% energy savings, as well as reduced maintenance costs. Typical applications for strip fixtures include retail environments, offices, supermarkets, meeting room and etc.

Features & Benefits

1. High lighting efficiency 135lm/W, Ra>80;
2. 0-10V dimmable driver, AC120-277V;
3. Reduces energy consumption up to 60%;
4. Glass-free;
5. Suitable for damp location;
6. Surface mounting installation;
7. UL and DLC listed;
8. 5 years warranty.


SPECIFICATION		
MODEL	SS-SP04-4FT60W/45W/35W-H-TCP	SS-SP04-8FT150/120/90W-H-TCP
WATTAGE	60/45/35W Tunable	150/120/90W Tunable
EFFICACY	135lm/W	
CCT	3500/4000/5000K Selectable	
CRI	Ra>80	
INPUT VOLTAGE	AC120-277V	
POWER FACTOR	> 0.9	
VIEWING ANGLE	> 120	
LIFE TIME	> 50000 hours	
WARRANTY	5 years limited	

WATTAGES: 4FT/8FT, from 35W to 150W

Packing/Weight

Size	Outer box (L*W*H)	Qty/Ctn (pcs)	N.W/pcs (lbs/Kg)	G.W/Ctn (lbs/Kg)
4ft	L49.61xW14.57xH14.17 inch L1260xW370xH360 mm	6	24.8/11.25	27.09/12.29
8ft	L49.61xW14.57xH14.17 inch L1260xW370xH360 mm	3	25.68/11.65	25.77/11.69


Product Dimension

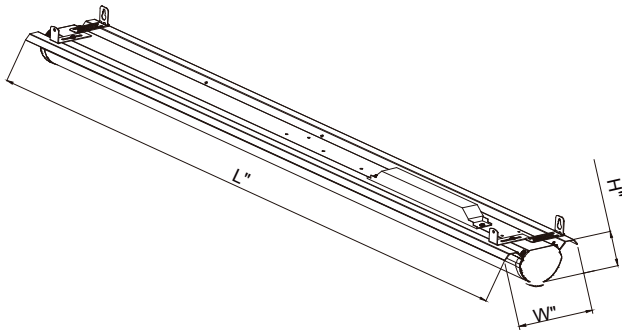


	L	H	W
4FT	1220[48.03"]	63[2.48"]	149[5.87"]
8FT	2436[95.91"]	63[2.48"]	149[5.87"]

Installation Instruction

1. Turn power off. Remove original lamps, ballast cover and sockets.

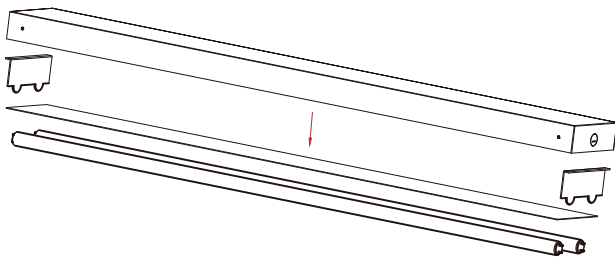


2. Align the lamp with the lamp holder, and tighten the lamp with the screw.

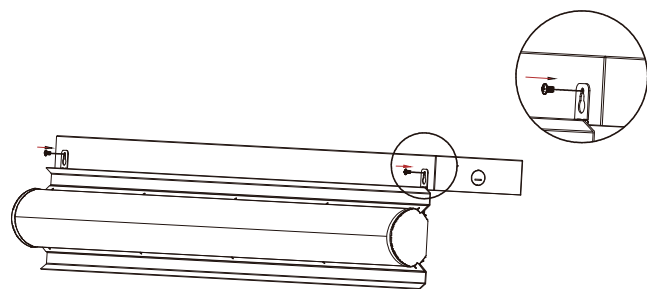

WATTAGES: 4FT/8FT, from 35W to 150W

3. Connecting wires as directed.

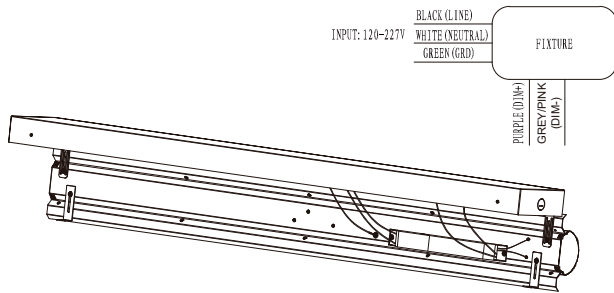

4. Align the lamp with the lamp holder, and tighten the lamp with the screw.



Applications:

